

WURTH WOOD GROUP

BLUM INVENTORY GUIDE



Featured Products.....	3
Clip Top BLUMOTION	4
Clip Top Mounting Plates.....	5-6
Concealed Hinges.....	7-10
BLUMOTION For Doors.....	11
Compact BLUMOTION.....	12
Compact Hinges.....	13-14
Hinge/Machine Accessories.....	15
Tandem Plus BLUMOTION.....	16
Tandem.....	17-18
Servo-Drive.....	19
Standard Runners.....	20
Metabox	21-23
Aventos.....	24-29
Tandembox.....	30-42
Legrabox.....	43-55
Tip On For Doors.....	56-57



AVENTOS HK-XS

AVENTOS HK-XS, the smaller, cost-effective lift system that offers high quality in a convenient package.

JUMP TO PAGE 29



LEGRABOX

Its straight lines create an elegant design, and new motion technology provides fluid running action in this unrivaled drawer. Experience it to believe it.

JUMP TO PAGE 43



TIP ON FOR DOORS

TIP-ON for doors was designed to work in face frame or panel cabinets and it also works in both overlay and inset applications.

JUMP TO PAGE 56

CLIP top BLUMOTION 110° Hinges



- BLUMOTION soft close integrated into the hinge cup
- Deactivation switch for small/light doors
- For door thicknesses up to 26mm (1")
- Boring distance range: 3mm to 7mm
- Compatible with existing CLIP mounting plates and hinge arm cover caps
- Press-in hinge must be inserted with knock-in tool or universal insertion ram

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	250	71B3550
Straight-arm	Press-in	Self-close	250	71B3580
Straight-arm	EXPANDO	Self-close	250	71B358E
Straight-arm	INSERTA	Self-close	250	71B3590
Half-cranked	Screw-on	Self-close	250	71B3650
Half-cranked	Press-in	Self-close	250	71B3680
Half-cranked	INSERTA	Self-close	250	71B3690
Full-cranked	Screw-on	Self-close	250	71B3750
Full-cranked	INSERTA	Self-close	250	71B3790

CLIP top BLUMOTION 110°+ Hinges



- For door overlays up to 22 mm
- BLUMOTION integrated into the hinge cup
- Deactivation switch for small/light doors
- Boring distance range: 3mm to 7mm
- Compatible with existing CLIP mounting plates and hinge arm cover caps
- Press-in hinge must be inserted with knock-in tool or universal insertion ram

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	250	73B3550
Straight-arm	Press-in	Self-close	250	73B3580
Straight-arm	EXPANDO	Self-close	250	73B358E
Straight-arm	INSERTA	Self-close	250	73B3590

CLIP top BLUMOTION Thick Door 95° Hinges



- BLUMOTION integrated into the hinge cup
- Deactivation switch for small/light doors
- For door thicknesses up to 30mm (1 3/16")
- Boring distance range: 3mm to 7mm
- Compatible with existing CLIP mounting plates and hinge arm cover caps
- Press-in hinges must be inserted with knock-in tool or universal insertion ram

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	250	71B9550
Straight-arm	Press-in	Self-close	250	71B9580
Straight-arm	INSERTA	Self-close	250	71B9590
Half-cranked	INSERTA	Self-close	250	71B9690
Full-cranked	Screw-on	Self-close	250	71B9750

CLIP top BLUMOTION 95° Inset Blind Corner Hinges



- BLUMOTION integrated into hinge cup
- Deactivation switch for small/light doors
- Boring distance range: 3mm to 7mm
- Compatible with existing CLIP mounting plates and hinge arm cover caps
- Press-in hinges must be inserted with knock-in tool or universal insertion ram

cup mount	closing	box qty	item no.
Screw-on	Self-close	50	79B9550
Press-in	Self-close	50	79B9580
INSERTA	Self-close	50	79B9590

Angle Restriction Clip



box qty	item no.
250	70T3553

- Restricts opening angle of the hinge to 86°
- For use with CLIP top BLUMOTION/CLIP top 110° and 110°+ hinges


CLIP top BLUMOTION Angled Hinges



- BLUMOTION integrated into the hinge cup
- Designed for panel (frameless) cabinets
- Spiral Tech depth adjustment which eliminates loosening and retightening the adjustment screws

angle	cup mount	box qty	item no.
Positive +15°	INSERTA	50	79B9494
Positive +30° II	INSERTA	50	79B9596
Positive +45° I	INSERTA	50	79B9698
Positive +45° II	INSERTA	50	79B3598
Positive +45° III	INSERTA	50	79B9498
Negative -15°	INSERTA	50	79B3493
Negative -30°	INSERTA	50	79B3491
Negative -45°	INSERTA	50	79B3490

CLIP Standard One-piece Wing Mounting Plates

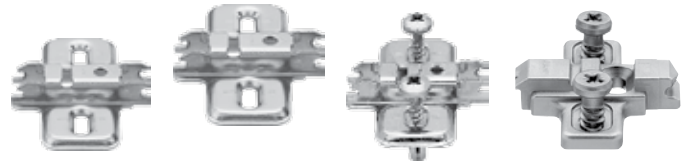

- Height adjustment: wood screw and system screw mounting plates $\pm 3\text{mm}$, EXPANDO mounting plates $\pm 2\text{mm}$
- Nickel-plated

height	mounted with	box qty	item no.
0mm steel	#6 x $\frac{5}{8}$ " wood screws	500	173L6100
3mm steel	#6 x $\frac{5}{8}$ " wood screws	500	173L6130
0mm steel	pre-mounted 5mm system screws	500	173L8100
3mm steel	pre-mounted 5mm system screws	500	173L8130
0mm steel	pre-mounted with EXPANDO dowels	500	174E610001
0mm steel	pre-mounted with EXPANDO dowels (for twin application)	500	174E610Z
0mm zinc die-cast	pre-mounted 5mm system screws	500	175L8100
9mm zinc die-cast	pre-mounted 5mm system screws	500	175L8190


CLIP Standard Two-piece Wing Mounting Plates



- Zinc die-cast, nickel-plated
- Height adjustment $\pm 2\text{mm}$

height	mounted with	box qty	item no.
0mm	#6 x $\frac{5}{8}$ " wood screws	50	175H7100
3mm	#6 x $\frac{5}{8}$ " wood screws	50	175H7130
9mm	#6 x $\frac{5}{8}$ " wood screws	50	175H7190
0mm	#7 x $\frac{5}{8}$ " wood screws	50	175H9100
3mm	#7 x $\frac{5}{8}$ " wood screws	50	175H9130
6mm	#7 x $\frac{5}{8}$ " wood screws	50	175H9160
9mm	#7 x $\frac{5}{8}$ " wood screws	50	175H9190
18mm	#7 x $\frac{5}{8}$ " wood screws	50	175H919022

CLIP CAM Adjustable Wing Mounting Plates

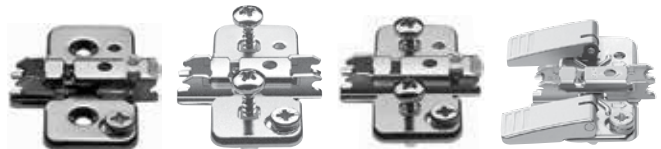

- Height adjustment: wood screw and system screw mounting plates $\pm 2\text{mm}$, EXPANDO and INSERTA mounting plates $\pm 2\text{mm}$
- Nickel-plated

height	mounted with	box qty	item no.
0mm	#6 x $\frac{5}{8}$ " wood screws	500	173H7100
3mm	#6 x $\frac{5}{8}$ " wood screws	500	173H7130
0mm	pre-mounted screws with EXPANDO dowels	500	174H7100E
3mm	pre-mounted screws with EXPANDO dowels	500	174H7130E
0mm	pre-mounted screws with EXPANDO dowels (for twin application)	500	174H710ZE
0mm	tool-free INSERTA	250	174H7100I

Cam Adjustable Face Frame Adapter Plate



- Steel, zinc die-cast and nickel-plated
- Attached with #7 x 3/4" wood screws
- Cam height adjustment ±2mm
- Use of Blum PLATEMATE recommended
- 175H6000 not for use with INSERTA hinges
- 175H6600 designed for use with INSERTA hinge cups

description	height	box qty	item no.
center mount	0mm	250	175H6000
center mount	3mm	250	175H6030
center mount	4.5mm	250	175H6040
center mount	6mm	250	175H6060
off-center mount	0mm	250	175H6600

Face Frame Adapter Plate with Flange



- Recommended when using the 170° and zero protrusion hinges on face frame cabinets
- Zinc die-cast, nickel-plated
- Attached with #7 x 3/4" wood screws
- Off-center mount 12.5mm (1/2")
- Height adjustment ±2mm
- Use of Blum PlateMate recommended

description	height	box qty	item no.
off-center mount	0mm	250	175L660024

Center Mount Face Frame Adapter Plate



- Zinc die-cast, nickel-plated
- Attached with #7 x 3/4" wood screws
- Height adjustment ±2mm
- Use of Blum PlateMate recommended

description	height	box qty	item no.
center mount	3mm	500	175L603021


Inset Face Frame Adapter



height	box qty	item no.
9mm	250	175H503021

- Use with half-cranked hinges only
- Zinc die-cast, nickel-plated
- Attach with #8 x 3/4" truss head screws
- Can be used on frames with applied bead molding
- Cam height adjustment ±2mm
- Wide angled hinges not recommended
- Use of Blum PlateMate required

Off-center Mount Face Frame Adapter Plate



description	height	box qty	item no.
off-center mount	0mm	500	175L660022
off-center mount	3mm	500	175L663022
off-center mount	6mm	500	175L666022

- Zinc die-cast, nickel-plated
- Attached with #7 x 3/4" wood screws
- Height adjustment ±2mm
- Use of Blum PlateMate recommended

CLIP top 107° Hinges



- 107° opening angle
- 3-dimensional adjustment
- All metal hinge, nickel-plated

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	250	75T1550
Straight-arm	Press-in	Self-close	250	75T1580
Straight-arm	INSERTA	Self-close	250	75T1590B

CLIP top 120° Hinges



- 120° opening angle
- 3-dimensional adjustment
- Available with INSERTA tool-free attachment
- All metal hinge, nickel-plated

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	250	71T5550
Straight-arm	Press-in	Self-close	250	71T5580
Straight-arm	EXPANDO	Self-close	250	71T558E
Straight-arm	INSERTA	Self-close	250	71T5590B
Half-cranked	Screw-on	Self-close	250	71T5650
Half-cranked	Press-in	Self-close	250	71T5680
Half-cranked	INSERTA	Self-close	250	71T5690B

CLIP top 120°+ Hinges



- 120° opening angle
- For larger overlays (21 mm maximum)
- Straight-arm hinges only
- 3-dimensional adjustment
- All metal hinge, nickel-plated

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	250	73T5550
Straight-arm	Press-in	Self-close	250	73T5580
Straight-arm	EXPANDO	Self-close	250	73T558E
Straight-arm	INSERTA	Self-close	250	73T5590B

CLIP top 110° Hinges



- 110° opening angle
- For door thicknesses up to 26mm (1")
- New INSERTA design
- New boring distance range 3mm to 7mm
- 3-dimensional adjustment
- Compatible with existing CLIP mounting plates and hinge arm cover caps

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	250	71T3550
Straight-arm	Press-in	Self-close	250	71T3580
Straight-arm	EXPANDO	Self-close	250	71T358E
Straight-arm	INSERTA	Self-close	250	71T3590
Half-cranked	Screw-on	Self-close	250	71T3650
Half-cranked	Press-in	Self-close	250	71T3680
Half-cranked	INSERTA	Self-close	250	71T3690
Full-cranked	Screw-on	Self-close	250	71T3750
Full-cranked	Press-in	Self-close	250	71T3780
Full-cranked	INSERTA	Self-close	250	71T3790
Straight-arm	Screw-on	Free swing	50	70T3550TL
Straight-arm	Press-in	Free swing	50	70T3580TL
Straight-arm	INSERTA	Free swing	50	70T3590TL

CLIP top 110°+ Hinges



- 110° opening angle
- For door overlays up to 22mm
- 3-dimensional adjustment
- All metal hinge, nickel-plated

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	250	73T3550
Straight-arm	Press-in	Self-close	250	73T3580
Straight-arm	EXPANDO	Self-close	250	73T358E
Straight-arm	INSERTA	Self-close	250	73T3590

CLIP top Thick Door 95° Hinges



- 95° opening angle
- For door thicknesses up to 30mm (1-3/16")
- 3-dimensional adjustment
- All metal hinge, nickel-plated

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	250	71T9550
Straight-arm	Press-in	Self-close	250	71T9580
Straight-arm	Press-in	Free swing	250	70T9580TL
Straight-arm	INSERTA	Self-close	250	71T9590B
Half-cranked	Screw-on	Self-close	250	71T9650
Half-cranked	Press-in	Self-close	250	71T9680
Half-cranked	INSERTA	Self-close	250	71T9690B
Full-cranked	Screw-on	Self-close	250	71T9750
Full-cranked	INSERTA	Self-close	250	71T9790B

CLIP top 170° Hinges



- 170° opening angle
- 3-dimensional adjustment
- All metal hinge, nickel-plated

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	125	71T6550
Straight-arm	Screw-on	Free swing	125	70T6550TL
Straight-arm	Press-in	Self-close	125	71T6580
Straight-arm	INSERTA	Self-close	125	71T6540B
Straight-arm	INSERTA	Free swing	125	70T6540TL
Half-cranked	Screw-on	Self-close	125	71T6650
Half-cranked	Press-in	Self-close	125	71T6680
Half-cranked	INSERTA	Self-close	125	71T6640B

CLIP top 155° Zero Protrusion Hinges



- 155° opening angle
- For use in cabinets with interior roll-outs
- 3-dimensional adjustment
- Available with INSERTA tool-free attachment
- All metal hinge, nickel-plated

hinge	cup mount	closing	box qty	item no.
Straight-arm	Press-in	Self-close	125	71T7530N
Straight-arm	INSERTA	Self-close	125	71T7540N01

CLIP top 95° Inset Blind Corner Hinges



- 95° opening angle
- 3-dimensional adjustment
- All metal hinge, nickel-plated

cup mount	closing	box qty	item no.
Press-in	Self-close	50	79T9580
INSERTA	Self-close	50	79T9590B

CLIP top 95° Mini Hinges



- 95° opening angle
- Side adjustment of +0.5mm to -3.5 mm
- For small doors or doors with small frames
- Must use 26mm drill bit (1" cannot be used)

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	50	71T0550

CLIP top 60° Bi-Fold Hinges



- 60° opening angle spiral tech side adjustment for door gap
- Spiral tech depth adjustment for in/out
- 4-dimensional adjustment
- All metal hinge, nickel-plated

cup mount	closing	box qty	item no.
Screw-on	Self-close	25	79T850010
Press-in	Self-close	25	79T853010

CLIP top 95° Glass Door Hinges



- 95° opening angle
- 3-dimensional adjustment
- For glass thickness of 4.5mm to 7mm
- Side adjustment of +5 to -3.5mm
- Fixing screws included
- Must use 26mm drill bit (1" cannot be used)

hinge	cup mount	closing	box qty	item no.
Straight-arm	Screw-on	Self-close	50	75T4100
description			box qty	item no.
cover cap for glass door - chrome			50	844140CR

CLIP top Diagonal 45° Hinges



- 110° opening angle
- 3-dimensional adjustment
- All metal hinge, nickel-plated

cup mount	closing	box qty	item no.
Screw-on	Self-close	50	79T5550
Press-in	Self-close	50	79T5580

Clip 100° Hinges



- 100° opening angle
- 3-dimensional adjustment
- All metal hinge, nickel-plated

hinge	cup mount	closing	box qty	item no.
Straight-arm	Press-in	Self-close	250	71M2580
Half-cranked	Press-in	Self-close	250	71M2680
Full-cranked	Press-in	Self-close	250	71M2780


CLIP top Angled Hinges



- Designed for panel constructed (frameless) cabinets, this hinge system accommodates cabinet front angles from -45° to +45°
- Spiral Tech depth adjustment eliminates the need for loosening and retightening the adjustment screws
- All components are nickel-plated and have self-closing action

angle	cup mount	box qty	item no.
Positive +15°	INSERTA	50	79A9494BT
Positive +20°	INSERTA	50	79A9595BT
Positive +30° II	INSERTA	50	79A9596BT
Positive +30° III	INSERTA	50	79A9496BT
Positive +45° I	INSERTA	50	79A9698BT
Positive +45° II	INSERTA	50	79AT5590B
Positive +45° III	INSERTA	50	79A9498BT
Negative -15°	INSERTA	50	79A5493BT
Negative -30°	INSERTA	50	79A5491BT
Negative -45°	INSERTA	50	79A5490BT

Angled Spacer Wedges for Angled Hinges



thickness	angle	box qty	item no.
2mm	-5°	50	171A5500
4mm	+5°	50	171A5010
5mm	+5°	50	171A5040
7mm	+5°	50	171A5070

130° Angle Restriction Clip



box qty	item no.
250	706103

- For use with Blum CLIP top and CLIP 170° hinges

86° Angle Restriction Clip



box qty	item no.
250	741103

- For use with Blum CLIP top and CLIP 107° hinges

Hinge Cup Cover Caps



box qty	item no.
1000	70T3504

- For use with CLIP top BLUMOTION hinges only
- Suitable for screw-on, press-in and EXPANDO hinge cups
- 70T1504 (Hinge cup cover cap - for use with CLIP top hinges)

Hinge Cover Caps



box qty	item no.
1000	701503

- For use with: Blum 100°, 107°, 110°, 110°+, 120°, 120°+, thick door and bi-fold hinges

3mm Spacer



box qty	item no.
50	1816130

- Reduces overlays by 3mm
- Mounts under CLIP wing mounting plates
- Gray Nylon

Angle Restriction Clips for 155° Hinges



description	box qty	item no.
110°	500	70T7503N
92°	250	70T7503N09

- Reduces opening angle of CLIP top 155° hinge to 110° or 92°
- For use with 125° and 155° hinges only
- Gray nylon

BLUMOTION 973A For Clip Top And Clip Hinges



- Soft-closing feature for Blum CLIP top and CLIP hinges
- Offers the same quality of motion as drawer systems with BLUMOTION
- Automatically adjusts to the closing force of the door
- Simple attachment to the hinge arm
- Designed for use with Blum Euro hinges only

hinge	for use with	box qty	item no.
Straight arm	CLIP top 107°, 110°, 110°, 120°, 95° thick door, 120° aluminum door and CLIP 100°, 107°	50	973A050001
Half-cranked arm	CLIP top 110°, 120°, 95° thick door and CLIP 100°	50	973A0600
Full-cranked arm	CLIP top 110°, 95° thick door and CLIP 100°	50	973A0700
For 170° hinges	CLIP top 170° Straight and Half-cranked arm	25	973A6000
For 125°/155° hinges	CLIP top 155° Straight and Half-cranked arm	25	973A7000

BLUMOTION 971A For Euro Hinges (panel mount)



Wing Plate (Screw-on)



Wing Plate (EXPANDO)



Face Frame Adapter Plate

- Soft closing feature for CLIP top and CLIP straight arm hinges
- Offers the same quality of motion as drawer systems with BLUMOTION
- Adjustable to various door sizes and weights (+3/-7mm range)
- For use with straight-arm hinge and either 0mm or 3mm mounting plate only

description	height	setback	attach with	box qty	item no.
Wing plate (screw-on)	0mm	37mm	#6 x 5/8" wood screws	25	971A0500
Face frame adapter plate (screw-on)	0mm	9.5mm	#6 x 5/8" wood screws	25	971A0700

BLUMOTION 970A For Euro Hinges



BLUMOTION 970A



**Face Frame
Adapter Plate**



37/32 Adapter

- Soft closing feature for CLIP top and CLIP hinges
- Offers the same quality of motion as drawer systems with BLUMOTION
- Automatically adjusts to the closing force of the door
- Installed into the top and/or bottom panel or with adapter plates on hinge-side
- Gray nylon

description	setback	box qty	item no.
BLUMOTION 970A	n/a	50	970A1002
Face frame adapter (screw-on)	9.5mm	50	9705701
37/32mm adapter (EXPANDO)	37mm	50	97055E1

COMPACT BLUMOTION 39C Hinges for Full Overlay



- BLUMOTION soft-close integrated into the hinge cup
- Deactivation switch for small/light doors
- Overload safety feature
- One piece wrap around hinge
- 1/2" cup depth
- Press-in hinges must be inserted with knock-in tool or COMPACT insertion ram

overlay	cup mount	box qty	item no.
1"	Screw-on	300	39C355B16
	Press-in	300	39C358B16
1 1/4"	Screw-on	300	39C355B20
	Press-in	300	39C358B20
1 5/16"	Screw-on	300	39C355B21
	Press-in	300	39C358B21
1 3/8"	Screw-on	300	39C355B22
	Press-in	300	39C358B22
1 1/2"	Screw-on	300	39C355B24
1 9/16"	Screw-on	300	39C355B25
	Press-in	300	39C358B25

COMPACT BLUMOTION 38N Hinges For Partial Overlay



- BLUMOTION soft-close integrated into the hinge cup
- Deactivation switch for small/light doors
- Overload safety feature
- One piece wrap around hinge
- 7/16" cup depth
- Press-in hinges must be inserted with knock-in tool or COMPACT insertion ram

overlay	cup mount	box qty	item no.
5/16"	Press-in	250	38N358B05
3/8"	Screw-on	250	38N355B06
	Press-in	250	38N358B06
1/2"	Screw-on	250	38N355B08
	Press-in	250	38N358B08
3/4"	Screw-on	250	38N355B12
	Press-in	250	38N358B12

COMPACT BLUMOTION 38C Hinges For Full Overlay



- BLUMOTION soft-close integrated into the hinge cup
- Deactivation switch for small/light doors
- Overload safety feature
- One piece wrap around hinge
- 7/16" cup depth
- Press-in hinges must be inserted with knock-in tool or COMPACT insertion ram

overlay	cup mount	box qty	item no.
1 1/4"	Screw-on	300	38C355B20
	Press-in	300	38C358B20
1 5/16"	Press-in	300	38C358B21

COMPACT BLUMOTION 38B Hinges for Face Mount



overlay	cup mount	box qty	item no.
1 3/8" or greater	Press-in	250	38B358BF22

- BLUMOTION soft close integrated into the hinge cup
- Deactivation switch for small/light doors
- Overload safety feature
- One piece face mount hinge - 1 3/8" overlay or greater
- 7/16" cup depth
- Press-in hinges must be inserted with knock-in tool or COMPACT insertion ram

Angle Restriction Clip



box qty	item no.
250	38C315B3

- For use with COMPACT BLUMOTION
- Restricts opening angle to 86°

COMPACT 38N Hinges For Partial Overlay



- 105° opening angle
- One piece assembly
- Wrap around or edge mount
- 7/16" cup depth
- ±1/8" height adjustment
- ±1/16" side adjustment
- +3/32", -1/32" cam depth adjustment
- Can be used with BLUMOTION 971A9700
- Steel, nickel-plated

overlay	cup mount	attachment	box qty	item no.
3/8"	Screw-on	Wrap around	250	38N355C06
	Press-in	Wrap around	250	38N358C06
1/2"	Screw-on	Wrap around	250	38N355C08
	Press-in	Wrap around	250	38N358C08
1/2"	Screw-on	Edge mount	250	38N355CE08
	Press-in	Edge mount	250	38N358CE08
5/8"	Screw-on	Wrap around	250	38N355C10
	Press-in	Wrap around	250	38N358C10
3/4"	Screw-on	Wrap around	250	38N355C12
	Press-in	Wrap around	250	38N358C12

COMPACT 39C Hinges For Full Overlay



- 110° opening angle
- One piece assembly
- Wrap around mount
- 1/2" cup depth
- ±1/8" height adjustment
- ±1/16" cam side adjustment
- +3/32", -1/32" cam depth adjustment
- Can be used with BLUMOTION 971A9700
- Steel, nickel-plated

overlay	cup mount	box qty	item no.
1 1/4"	Press-in	300	39C358C20
1 5/8"	Press-in	300	39C358C21
1 3/8"	Press-in	300	39C358C22

COMPACT 38C Hinges For Full Overlay



- 107° opening angle
- One piece assembly
- Wrap around mount
- 7/16" cup depth
- ±1/8" height adjustment
- ±1/16" side adjustment
- +3/32", -1/32" cam depth adjustment
- Can be used with BLUMOTION 971A9700
- Steel, nickel-plated

overlay	cup mount	box qty	item no.
1 1/4"	Screw-on	300	38C355C20
1 1/4"	Press-in	300	38C358C20
1 5/8"	Press-in	300	38C358C21
1 3/8"	Press-in	300	38C358C22
1 1/2"	Press-in	300	38C358C24
1 1/8"	Press-in	300	38C358C25


COMPACT 33 Hinges



cup mount	box qty	item no.
Screw-on	250	333600
Press-in	250	333630

- 110° opening angle
- Two piece assembly
- Edge or face mount
- 1/2" cup depth
- ±9/64" height adjustment
- -1/8" side adjustment only
- Zinc die-cast hinge

COMPACT 33 Mounting Plates



- Zinc die-cast, nickel-plated
- Attached with #6 x 5/8" wood screws
- Overlays from 1/4" to 1 5/8"
- Blum COMPACT 33 hinge arms sold separately

overlay	box qty	item no.
1/4"	250	130110024
1/2"	250	130110023
5/8"	250	130110026
3/4"	250	130110022
1"	250	130111002
1 1/8"	250	130112002
1 1/4"	250	130113002
1 3/8"*	250	130114002
1 1/2"*	250	130115002
1 5/8"*	250	1301160

*An additional screw is required on mounting plates with 1 3/8" to 1 5/8" overlays to insure stability

BLUMOTION 971A for COMPACT Hinges



- Can be used for all COMPACT overlays
- Polybag set includes: BLUMOTION mechanism, spacer and screws
- For full overlay applications (1" or greater) use without spacer
- For partial overlay applications (less than 1") use with spacer

description	box qty	item no.
971A polybag	125	971A970022
mechanism	250	971A9700
spacer	500	971A9709


Hinge Distance Spacer for COMPACT Hinges



box qty	item no.
1000	363515

- Decreases door overlay in 1/32" increments
- Can be stacked to achieve desired overlay reduction
- Zinc-coated steel

Insertion Ram

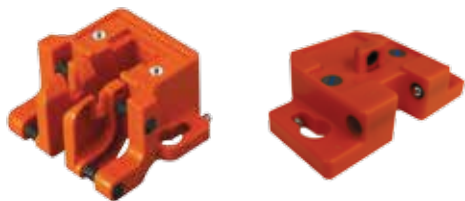

description	item no.
Euro insertion ram	MZM0040
COMPACT insertion ram	MZM0047
#10 insertion ram	MZM0010

Press-in and EXPANDO Dowels



box qty	item no.
1000	700532
1000	174H7100E8

Installation Screw



- 8mm dowel installation screw

box qty	item no.
1000	6081200

Twin Application Screws



- 6122010 screw - 14 mm (9/16")
- 6122020 sleeve - 20 mm (25/32")
- 6122420 sleeve - 24 mm (15/16")

box qty	item no.
1000	6122010

Machine Drill Bits



description	item no.
ø8mm drill bit (left handed)	M01ZB0803L
ø35 with center point	M01ZB3502R

TANDEM plus BLUMOTION 563H



drawer length	box qty	item no.
9" (229mm)	6	563H2290B10
12" (305mm)	6	563H3050B
15" (381mm)	6	563H3810B
18" (457mm)	6	563H4570B
21" (533mm)	6	563H5330B

- 4-dimensional adjustment
- Elongated holes for depth adjustment
- Bottom mount holes 15", 18", and 21" lengths
- Full extension concealed drawer runners
- Face frame or panel cabinets
- Static load capacity of 100 lb

TANDEM plus BLUMOTION 563.



drawer length	box qty	item no.
18" (457mm)	6	5634570B
21" (533mm)	6	5635330B

- 4-dimensional adjustment
- Elongated holes for depth adjustment
- Bottom mounting holes
- Full extension concealed drawer runners
- Panel or blocked out face frame cabinets
- BLUMOTION soft closing
- TANDEM smooth running action
- Static load capacity of 100 lb

TANDEM Template for 563/569



item no.
T651600

TANDEM plus BLUMOTION 569H/569.



drawer length	box qty	item no.
18" (457mm)	6	569H4570B
21" (533mm)	6	569H5330B
24" (610mm)	6	5696100B
27" (686mm)	4	5696860B
30" (762mm)	4	5697620B

- 4-dimensional adjustment
- Elongated holes for depth adjustment
- Full extension concealed drawer runners
- Panel or blocked-out face frame cabinets
- BLUMOTION soft closing
- TANDEM smooth running action
- Static load capacity of 150lb

Side Adjustable Locking Device



side	box qty	item no.
right	100	T511901R
left	100	T511901L

- Minimum inside drawer width 6 11/16" (170mm)
- Height adjustment +1/8" (3mm)
- Side adjustment ±1/16" (1.5mm)
- For use with 563/569 runners only

Side and Depth Adjustable Locking Device



side	box qty	item no.
right	100	T511901PSR
left	100	T511901PSL

- Optional for inset applications
- Height adjustment +1/8" (3mm)
- Depth adjustment +3/32" (2.5mm), preset at 0
- Side adjustment ±1/16" (1.5mm)
- For use with 563/569 runners only
- Minimum sub front thickness 1/2" (13mm)
- Integrated 1/8" (3mm) distance bumper

Tandem Plus 562H Full Extension Drawer Runners



- Full extension concealed drawer runners
- For $\frac{5}{8}$ " (16mm) maximum drawer side thickness
- Rear tilt adjustment
- Locking devices enable easy drawer insertion and removal
- Force-guided right side and $\pm \frac{1}{16}$ " (1.5mm) tolerance-compensating left side
- Dynamic load capacity of 75 lb
- Static load capacity of 100 lb.

Tandem Plus Non-Blumotion

drawer length	box qty	item no.
12" (305mm)	6	562H3050C
15" (381mm)	6	562H3810C
18" (457mm)	6	562H4570C
21" (533mm)	6	562H5330C

Standard Locking Device



- For use with standard applications
- Tool-free drawer height adjustment $+\frac{1}{8}$ " (3mm)
- For use with 552 and 562 runners only

description	box qty	item no.
right locking device	100	T51170004R
left locking device	100	T51170004L


TIP-ON / Touch Latch for Tandem Plus



box qty	item no.
12	T557150S
description	item no.
Stabilization	T55908WR

- Designed for drawers without pulls
- Opens the drawer with just a touch of the drawer front
- Tool-free attachment of mechanism and trigger to the cabinet profile
- Performs best with loads up to 45 lb.
- Only works with TANDEM plus 562 H/F "C" series runners without BLUMOTION


Screw-on Socket for TANDEM plus BLUMOTION 9"

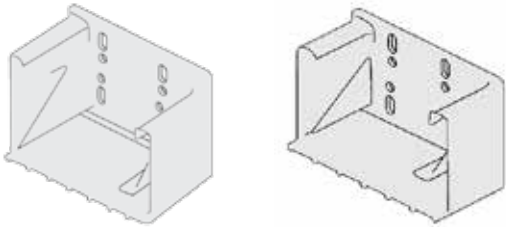

- Two required per drawer
- Use at least three #6 truss head screws
- Side-to-side self-alignment

cabinet depth	box qty	item no.
10 ¹⁵ / ₃₂ " - 11 ³ / ₃₂ "	100	295370021
11 ⁵ / ₃₂ " - 11 ²⁵ / ₃₂ "	100	295370022


Drawer Front Adjuster



- Nylon housing with pre-mounted 8-32 steel nut
- Four-sided drawers
- Adjusts height and side-to-side by ³/₁₆" (5mm)

box qty	item no.
1000	295100021

Tandem 552H Partial Extension Drawer Runners

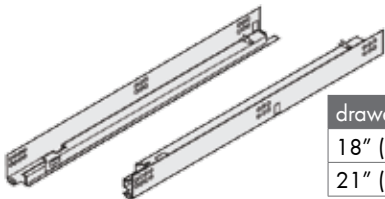

drawer length	box qty	item no.
18" (457mm)	10	552H4570N
21" (533mm)	10	552H5330N


- Partial extension concealed drawer runners
- For ⁵/₈" (16mm) maximum drawer side thickness
- Zinc-coated steel profiles
- Concealed roller carriages with permanently lubricated synthetic rollers create a smooth running action
- Locking devices enable easy drawer insertion and removal
- Force-guided rightside and ¹/₁₆" (1.5mm) tolerance compensating left side
- Dynamic load capacity of 75 lb.
- Static load capacity of 100 lb.

TANDEM Drill Bit



description	item no.
Ø2.5mm drill bit	DB25MM
Ø6mm drill bit	DB6MM

Universal Bracket Set



- Set includes: (4) brackets and (8) M4 screws
- Zinc-coated steel brackets

box qty	item no.
10	2954000


Side Spacer



- For spacing out TANDEM runners from the cabinet side for clearance on interior roll-outs

description	box qty	item no.
side spacer - 1" thick	100	T593570


Screw-on Bracket and Screw-on Socket

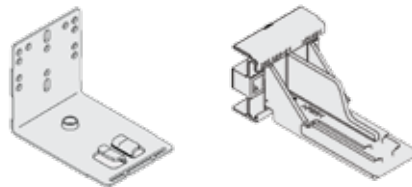

description	box qty	item no.
screw-on bracket	100	295375001
screw-on socket	100	2956400

Lateral Stabilizer for TandemPlus BLUMOTION Drawer Slides

- Synchronizes left and right runners to prevent racking when the drawer is pulled open.
- Ideal for wide drawer applications.
- For panel cabinets and blocked out face frame applications on drawers 9" to 27" in length.

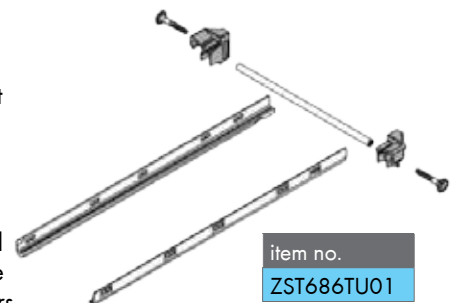

item no.
ZST686TU01

SERVO-DRIVE - Vertical Aluminum Profile



- For TANDEM and TANDEMBOX drawers
- Enables installation of drive units with multiple drawers

description	box qty	item no.
A. profile with 31½" cable	10	Z10T720AB
B. top and bottom adapter set	each	Z10D01E001
C. drive unit	each	Z10A300002
D. blum distance bumper	100	9930531

SERVO-DRIVE - Bottom Bracket



- For TANDEM and TANDEMBOX drawers
- Enables bottom mount installation of drive unit for single drawer application

description	box qty	item no.
Bottom bracket, double	10	Z10D720101

INSERTA Cable Connector



description	box qty	item no.
INSERTA cable connector	50	Z10V100001
INSERTA cable connector set	each	Z10V100E01

Power Supply, Power Cord, Wall Mount Bracket



description	box qty	item no.
power supply	each	Z10NE020G
power cord with 3 prong plug	10	Z10M200U
wall mount bracket for power supply	10	Z10NG120

Universal Cable and Cable Clip



description	box qty	item no.
universal cable - 26'	10	Z10K800AE
cable clip	100	Z10K0009


SERVO-DRIVE Waste/Recycle Set



- Set includes: adapter plate, drive unit, double bottom bracket, 110v plug-in power supply with 6' cable, (4) screw-on distance bumpers, INSERTA cable connector, mounting template and instruction sheet
- All necessary mounting screws are included
- For use with TANDEM and TANDEMBOX drawers


description	item no.
waste/recycle set	Z10NA20UGUS

SERVO-DRIVE Drive Unit



description	box qty	item no.
Drive Unit		Z10A300002

STANDARD 230M Series Drawer Runners

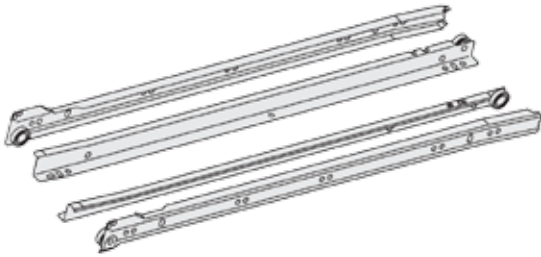

- Single extension, bottom mounted
- Durable epoxy coating
- Smooth running synthetic rollers on tempered steel axles
- Captive RH profiles/ tolerance LH profiles
- 1/2" side clearance
- Double warning lift out stop
- BLUMATIC self-closing action
- Angled drawer and cabinet profiles create a parallel drop of 3/32"

length	color	box qty	item no.
10"	white	25	230M2500
12"	white	25	230M3000
14"	white	25	230M3500
16"	white	25	230M4000
18"	white	25	230M4500
20"	white	25	230M5000
22"	white	25	230M5500
24"	white	25	230M6000
26"	white	25	230M6500
32"	white	25	230E8000

230M Rear Mount Sockets



description	box qty	item no.
left	500	602301
right	500	602300
socket set	100	602320

- Synthetic, neutral color
- Attach with #6 x 1/2" truss head screws

230M Heavy Duty Spacer



box qty	item no.
1300	6027500000

- Space thickness 3/4"


STANDARD 430E Series Drawer Runners



- Full extension, bottom mounted
- Durable epoxy coating
- Smooth running synthetic rollers on tempered steel axles
- Double captive profiles
- Lock out stops to prevent drawer removal
- 1 1/4" over extension

length	color	box qty	item no.
16"	cream	10	430E4000V
18"	cream	10	430E4500V
20"	cream	10	430E5000V
22"	cream	10	430E5500V

Drawer Front Adjuster



box qty	item no.
1000	2951000


Minifix



box qty	item no.
10	653300

- For precise positioning of cabinet profile fixing screws


METABOX 320M Drawer Series - single extension



- Side height of 3 $\frac{3}{8}$ " (86mm)
- Dynamic = 75 lb. Static load = 100 lb.

length	color	box qty	item no.
11"	white	10	320M2700C15
14"	white	10	320M3500C15
16"	white	10	320M4000C15
18"	white	10	320M4500C15
20"	white	10	320M5000C15
22"	white	10	320M5500C15


METABOX 320N Drawer Series - single extension

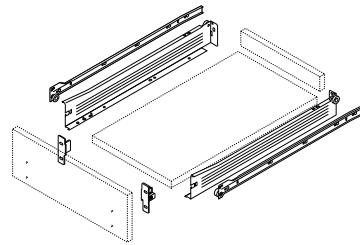

- Side height of 2 $\frac{1}{8}$ " (54mm)
- Dynamic = 75 lb. Static load = 100 lb.

length	color	box qty	item no.
14"	white	10	320N3500C15
16"	white	10	320N4000C15
18"	white	10	320N4500C15
20"	white	10	320N4500C15
22"	white	10	320N5500C15


METABOX 320K Drawer Series - single extension



- Side height of 4 $\frac{5}{8}$ " (118mm)
- Dynamic = 75 lb. Static load = 100 lb.

length	color	box qty	item no.
14"	white	10	320K3500C15
16"	white	10	320K4000C15
18"	white	10	320K4500C15
20"	white	10	320K5000C15
22"	white	10	320K5500C15


METABOX 320H Drawer Series - single extension



- Side height of 5 $\frac{7}{8}$ " (150mm)
- Dynamic = 75 lb. Static load = 100 lb.

length	color	box qty	item no.
14"	white	10	320H3500C15
16"	white	10	320H4000C15
18"	white	10	320H4500C15
20"	white	10	320H5000C15
22"	white	10	320H5500C15


METABOX 330M Drawer Series - full extension



- Side height of 3 $\frac{3}{8}$ " (86mm)
- Dynamic = 75 lb. Static load = 100 lb.

length	color	box qty	item no.
22"	white	10	330M550PC15


METABOX 330H Drawer Series - full extension



- Side height of 5 $\frac{7}{8}$ " (150mm)
- Dynamic = 75 lb. Static load = 100 lb.

length	color	box qty	item no.
16"	white	10	330H400PC15
20"	white	10	330H500PC15
22"	white	10	330H550PC15


METABOX 320N Standard Front Fixing Bracket



- Nickel-plated steel

attachment	side	box qty	item no.
Screw-on	right	10	ZSF151004
Screw-on	left	10	ZSF151005
Press-in	right	10	ZSF161004
Press-in	left	10	ZSF161005


METABOX 320M,K,H Standard Front Fixing Bracket



- Nickel-plated steel

attachment	side	box qty	item no.
Screw-on	right	250	ZSF1700R
Screw-on	left	250	ZSF1700L
Press-in	right	250	ZSF1800R
Press-in	left	250	ZSF1800L


METABOX 320M,K,H Clip-on Front Fixing Bracket

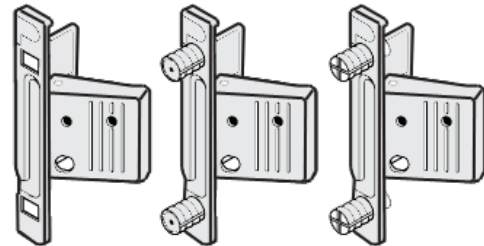

- Nickel-plated steel

attachment	side	box qty	item no.
Screw-on	right	250	ZSF1200R
Screw-on	left	250	ZSF1200L
Press-in	right	250	ZSF1300R
Press-in	left	250	ZSF1300L
EXPANDO	right	250	ZSF130ER
EXPANDO	left	250	ZSF130EL

METABOX 320N Screw-on Interior Front Fixing Bracket



side	box qty	item no.
right	20	ZIF301002W
left	20	ZIF301003W

- White nylon

METABOX 320M Screw-on Interior Front Fixing Bracket



side	box qty	item no.
right	100	ZIF300002W
left	100	ZIF300003W

- White nylon

METABOX 320H Screw-on Interior Front Fixing Bracket



side	box qty	item no.
right	20	ZIF3050RW
left	20	ZIF3050LW

- White nylon


BLUMOTION for METABOX Set



- Set includes: gray mechanism and white latch

item no.
Z700320


POSI-STOP Assembly for METABOX



- Synthetic, natural finish
- Non-handed
- Use two per drawer
- Snap in place and secure with wood screws

description	box qty	item no.
1/16" (1.5mm) gap	250	298321001
1/8" (3mm) gap	250	298323001


METABOX INSERTA Gallery Set

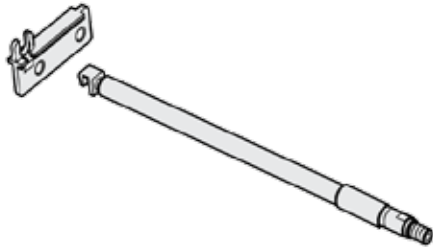

- Set includes: 2 adjustable rails and 2 rear fixing brackets

length	color	box qty	item no.
22"	white	10	ZRE521SID


METAFILE SET for METABOX

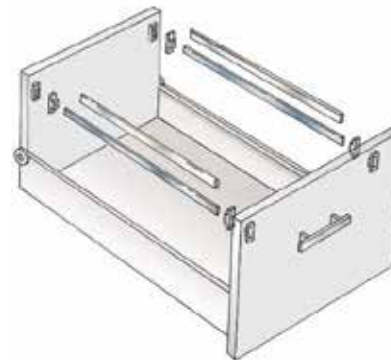

- Set includes: (2) steel hanging rails, (4) rail support brackets, (4) rail support covers, (2) glide profiles and (8) #6 x 3/4" flathead wood screws

description	box qty	item no.
METAFILE kit, white	10	ZRM5500USW
hanging rail, zinc coated	50	ZRM1100S

Cabinet Profile Spacer for METABOX



box qty	item no.
250	320M0188

- 5/16" (8mm) with Ø5 3/16" x 11 dowel for linebore mounting



AVENTOS HF – Bi-fold Lift System

The bi-fold lift system opens easily, remains in any desired position and closes silently and effortlessly, thanks to BLUMOTION.

Note: Power factor = cabinet height (inch) x combined door weight (lb)

description	item no.
lift mechanism set, power factor = 85 - 230*	20F2200N5
lift mechanism set, power factor = 231 - 470	20F2200N5
lift mechanism set, power factor = 471 - 880	20F2500N5
lift mechanism set, power factor = 780 - 1440	20F2800N5
lift mechanism set, power factor = 1401 - 2300**	20F2800N5
cover set	20F8000NA
telescopic arm set, cabinet height 18 7/8" - 22"	20F320001
telescopic arm set, cabinet height 22" - 27"	20F350001
telescopic arm set, cabinet height 27" - 37"	20F380001
telescopic arm set, cabinet height 35" - 42"	20F390001
wood or wide aluminum door hardware set	78Z5530TA8
narrow aluminum door hardware set	78Z550ATA6
mounting plate with bracket set	175H3F00
104° restriction clip	20F7051

*one lift mechanism required

**three lift mechanisms required

SERVO-DRIVE for AVENTOS HF

SERVO-DRIVE for AVENTOS opens and closes automatically with a light touch on the front for opening and a simple press of a button for closing.

description	item no.
SERVO-DRIVE set	21FA000
cover set	21F8000NA
power supply set	Z10NE02UG10





AVENTOS HL - Lift Up System

The one piece door front lifts up vertically and provides unhindered access to the interior. This lift system is the ideal solution for an appliance garage or wall cabinet.

description	item no.
lift mechanism set	20L2100N5
lift mechanism set	20L2300N5
lift mechanism set	20L2500N5
lift mechanism set	20L2700N5
lift mechanism set	20L2900N5
cover set	20L8000N1
arm assembly set	20L320006
arm assembly set	20L350006
arm assembly set	20L380006
arm assembly set	20L390006
oval stabilizer rod	20Q1061UA
wood or wide aluminum door hardware set	20S4200
narrow aluminum door hardware set	20S4200A
mounting plate with bracket set	20S4F01
appliance garage bracket set	20L7001

SERVO-DRIVE for AVENTOS HL

SERVO-DRIVE for AVENTOS opens and closes automatically with a light touch on the front for opening and a simple press of a button for closing.

description	item no.
SERVO-DRIVE set	21FA000
cover set	21L8000NA
arm assembly - cabinet height 11 ¹³ / ₁₆ " - 13 ³ / ₄ "	21L3200
arm assembly - cabinet height 13 ¹³ / ₁₆ " - 15 ¹³ / ₁₆ "	21L3500
arm assembly - cabinet height 15 ³ / ₄ " - 21 ⁵ / ₈ "	21L3800
arm assembly - cabinet height 17 ¹¹ / ₁₆ " - 22 ¹³ / ₁₆ "	21L3900
power supply set	Z10NE02UG10





AVENTOS HK - Stay Lift System

With AVENTOS HK, the one piece door front lifts up. Optimal for low cabinet heights.

Note: Power factor = cabinet height (inch) x combined door weight (lb)

description	item no.
lift mechanism set, power factor = 43 - 99	20K2300N5
lift mechanism set, power factor = 100 - 174	20K2500N5
lift mechanism set, power factor = 175 - 349	20K2700N5
lift mechanism set, power factor = 350 - 792	20K2900N5
cover set	20K8000NA
wood or wide aluminum door hardware set	20S4200
narrow aluminum door hardware set	20S4200A
75° restriction clip	20K7011

SERVO-DRIVE for AVENTOS HK

SERVO-DRIVE for AVENTOS opens and closes automatically with a light touch on the front for opening and a simple press of a button for closing.

description	item no.
SERVO-DRIVE set	21KA000
cover set	21K8000NA
power supply set	Z10NE02UG10





AVENTOS HK-S - Stay Lift System

AVENTOS HK-S is easy to open and closes silently and effortlessly. The variable stop also holds the small stay lift in any desired position.

Note: Power factor = cabinet height (inch) x combined door weight (lb)

description	item no.
lift mechanism set, power factor = 19 - 39	20K2B00N1
lift mechanism set, power factor = 40 - 85	20K2C00N1
lift mechanism set, power factor = 86 - 177	20K2E00N1
wood or wide aluminum mounting plate set	175H3100
narrow aluminum door mounting plate	20K4A00A
75° restriction clip	20K7A11
100° restriction clip	20K7A41





AVENTOS HS - Up and Over Lift System

AVENTOS HS provides comfort of motion that is sure to impress. Even heavy doors can be opened effortlessly. The variable stop ensures that the door always remains in the desired position, so the handle will always be within reach.

description	item no.
lift mechanism set	20S2A00N5
lift mechanism set	20S2B00N5
lift mechanism set	20S2C00N5
lift mechanism set	20S2D00N5
lift mechanism set	20S2E00N5
lift mechanism set	20S2F00N5
lift mechanism set	20S2G00N5
lift mechanism set	20S2H00N5
lift mechanism set	20S2I00N5
cover set	20S8000NA
arm assembly set	20S350005
round stabilizer rod	20Q1061UN
wood or wide aluminum door hardware set	20S4200
narrow aluminum door hardware set	20S4200A

SERVO-DRIVE for AVENTOS HS

SERVO-DRIVE for AVENTOS opens and closes automatically with a light touch on the front for opening and a simple press of a button for closing.

description	item no.
SERVO-DRIVE set	21FA000
cover set	20S8000NA
arm assembly set	21S8000NA
power supply set	21S3500.01





AVENTOS HK-XS - Up and Over Lift System


AVENTOS HK-XS is a smaller, cost-effective lift system for shallow wall cabinets, like those above refrigerators and pantries. Its variable stop feature allows the door to stay in any desired position, so it's always within reach. The lift mechanism can also be used on one or both sides of the cabinet, making it a flexible option for many applications.

description	item no.
lift mechanism set	20K1101
lift mechanism set	20K1301
lift mechanism set	20K1501
lift mechanism set - tip on	20K1101T
lift mechanism set - tip on	20K1301T
lift mechanism set - tip on	20K1501T
front fixing bracket - wood/wide alu	20K4101
front fixing bracket - narrow alu	20K4101A
front fixing bracket - FF - large OL	20K4501
cabinet fixing brackets - screw-on	20K5101
cabinet fixing brackets - expando	20K51E1
cabinet fixing brackets - face frame	20K5501

TANDEMBOX

STANDARD HEIGHT FINDER

N height

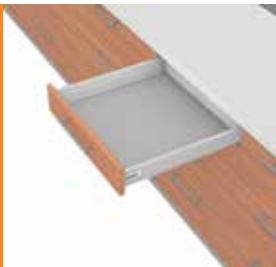


- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Two-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb
- Drawer side height 69 (2-11/16")

M height



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Two-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 84 (3-5/16")

B height

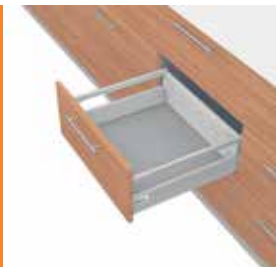

- Full extension drawer system with BLUMOTION
- TANDEM smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacities of 75 lb and 150 lb
- Drawer side height 146 (5-3/4")

D height



- Full extension drawer system with BLUMOTION
- TANDEM smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacities of 75 lb and 150 lb
- Drawer side height 207 (8-1/8")

TANDEMBOX

STANDARD DRAWER ASSEMBLY


Measure inside cabinet width

Use inside cabinet width (ICW) to calculate the drawer bottom and back dimensions. Formulas are found on the specification page of each application.

M height example:

Drawer bottom: Width = Inside cabinet width minus **75** (2-15/16")
 Length = Actual cabinet profile length minus **24** (15/16")
 Drawer back: Width = Inside cabinet width minus **87** (3-7/16")
 Height = **84** (3-5/16")



Use **16** (5/8") material for drawer bottom and back



Step 2

Attach drawer back


Rear fixing brackets are attached with #6 x 1/2" truss head screws (612TH). The drawer back, with rear fixing brackets attached, snaps into the rear of both drawer profiles.

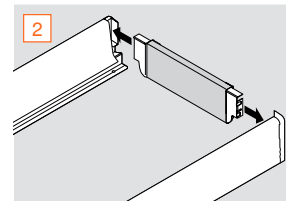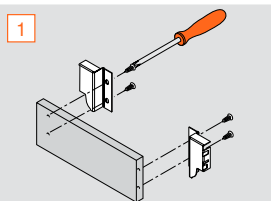

Step 3

Slide drawer bottom into drawer sides


The drawer bottom slides into the drawer profiles.

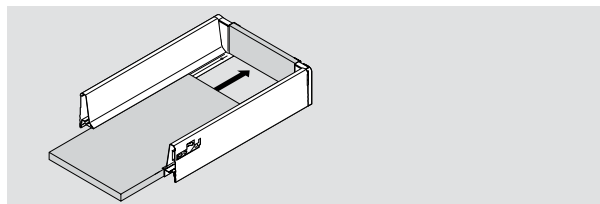

Step 4

Attach drawer front

Follow the installation drawing for locating hole positions for front fixing brackets (and optional gallery rods if used) and pre-bore the necessary INSERTA Ø10 x 12 holes (screw-on versions also available). Attach front fixing brackets and snap drawer front onto drawer.

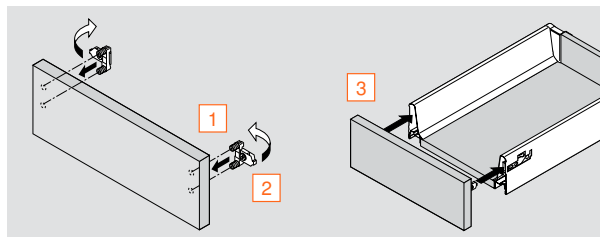


Step 5



Attach drawer bottom with screws

Push the drawer bottom flush with the front of the drawer. Pre-bore and attach with wood screws (612TH).

Attach cover caps to drawer side.

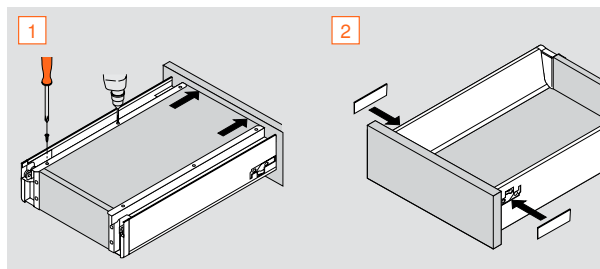

TANDEMBOX N

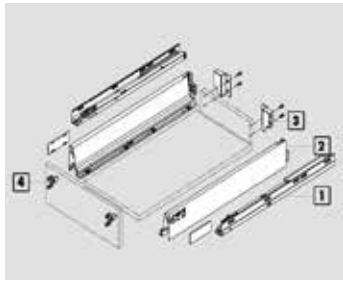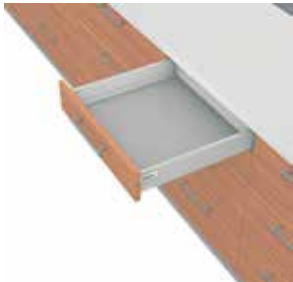

- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Two-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb
- Drawer side height 69 (2-11/16")

#1 Select cabinet profile

length	cabinet profile (75 lb)
17 11/16"	5584501B01R&L
19 11/16"	5585001B
21 5/8"	5585501B

#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358N4502SARLR906	358N4502IAL&R
19 11/16"	358N5002SARLR906	358N5002IAL&R
21 5/8"	358N5502SARLR906	358N5502IAL&R



#3 Select rear fixing bracket (nickel or gray)

description	sides	item #
rear bracket set	left and right	Z30N000S04NI

#4 Select front fixing bracket

description	sides	item #
INSERTA	left and right	ZSF3902
screw-on	left and right	ZSF350202

TANDEMBOX M



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Two-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 84 (3-5/16")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R



#3 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30M000S04NI

#4 Select front fixing bracket

description	sides	item #
INSERTA	left and right	ZSF3902
screw-on	left and right	ZSF350202

TANDEMBOX B single gallery



- Full extension drawer system with BLUMOTION
- TANDEM smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacities of 75 lb and 150 lb
- Drawer side height 146 (5-3/4")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R

#3 Select gallery rail (gray or stainless steel)

length	gray	stainless steel
17 11/16"	ZRG387RSIC	ZRG387RIIC
19 11/16"	ZRG437RSIC	ZRG437RIIC
21 5/8"	ZRG487RSIC	ZRG487RIIC



#4 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30B000S04NI

#5 Select front fixing bracket

description	sides	item #
INSERTA	left and right	ZSF3902
screw-on	left and right	ZSF350202

TANDEMBOX D single gallery



- Full extension drawer system with BLUMOTION
- TANDEM smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacities of 75 lb and 150 lb
- Drawer side height 207 (8-1/8")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R

#3 Select gallery rail (gray or stainless steel)

length	gray	stainless steel
17 11/16"	ZRG387RSIC	ZRG387RIIC
19 11/16"	ZRG437RSIC	ZRG437RIIC
21 5/8"	ZRG487RSIC	ZRG487RIIC


#4 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30D000SLNI

#5 Select front fixing bracket

description	sides	item #
INSERTA	left and right	ZSF3902
screw-on	left and right	ZSF350202

TANDEMBOX D double gallery



- Full extension drawer system with BLUMOTION
- TANDEM smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacities of 75 lb and 150 lb
- Drawer side height 207 (8-1/8")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R

#3a Select top rail (gray or stainless steel)

length	gray	stainless steel
17 11/16"	ZRG387RSIC	ZRG387RIIC
19 11/16"	ZRG437RSIC	ZRG437RIIC
21 5/8"	ZRG487RSIC	ZRG487RIIC

#3b Select center rail (gray or stainless steel)

length	gray	stainless steel
17 11/16"	ZRG387RSIE	ZRG387RIIE
19 11/16"	ZRG437RSIE	ZRG437RIIE
21 5/8"	ZRG487RSIE	ZRG487RIIE



#4 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30D000SLNI

#5 Select front fixing bracket

description	sides	item #
INSERTA	left and right	ZSF3902
screw-on	left and right	ZSF350202

TANDEMBOX D galley with design element



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 207 (8-1/8")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (gray)

length	drawer profile (gray)
17 11/16"	358M4502SAL&R
19 11/16"	358M5002SARLR906
21 5/8"	358M5502SARLR906

#3 Select rail

length	gray
17 11/16"	ZRG387RSIC
19 11/16"	ZRG437RSIC
21 5/8"	ZRG487RSIC

#4 Select design element

length	metal
17 11/16"	Z37A417D
19 11/16"	Z37A467D
21 5/8"	Z37A517D

#5 Select gallery bracket set

description	sides	item #
bracket set	left and right	Z36D0080


#6 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30D000SLNI

#7 Select front fixing bracket

description	sides	item #
INSERTA	left and right	ZSF3902
screw-on	left and right	ZSF350202

TANDEMBOX D BOXCOVER with design element



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 203 (8")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (stainless steel)

length	drawer profile (ss)
17 11/16"	358L4502IA2L&R
19 11/16"	358L5002IA2L&R
21 5/8"	358L5502IA2L&R

#3 Select BOXCOVER

description	sides	item #
BOXCOVER set	front and rear	Z36L002GI

#4 Select design element

length	glass
17 11/16"	Z37G390DUS
19 11/16"	Z37G440DUS
21 5/8"	Z37G490DUS



#5 Select rear bracket (nickel)

description	sides	item #
bracket set	left and right	Z30D000SLNI

#6 Select front bracket

length	metal
EXPANDO	ZSF532E
screw - on	ZSF5220

TANDEMBOX D with BOXCAP



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 201 (7-15/16")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (stainless steel)

length	drawer profile (ss)
17 11/16"	358L4502IA2L&R
19 11/16"	358L5002IA2L&R
21 5/8"	358L5502IA2L&R

#3 Select BOXCAP

length	metal
17 11/16"	Z37L440IDL&R
19 11/16"	Z37L490IDL&R
21 5/8"	Z37L540IDL&R



#4 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30D000SLNI

#5 Select front bracket

length	metal
EXPANDO	ZSF532E
screw - on	ZSF5220

TANDEMBOX M interior roll-out



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Two-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 84 (3-5/16")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R

#3 Select front piece (nickel)

description	item #
front piece	Z31L1036ANI

#4 Select front fixing bracket (nickel)

description	sides	item # (gray)	item # (nickel)
front bracket set	left and right	ZIF71M0	ZIF80M0NI


#5 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30M000S04NI

#6 or #7 Select handle without or with latch

description	item # (w/o latch)	item # (with latch)
int front handle	ZIF80M5DG	ZIF80M7DG

TANDEMBOX D interior roll-out with single gallery

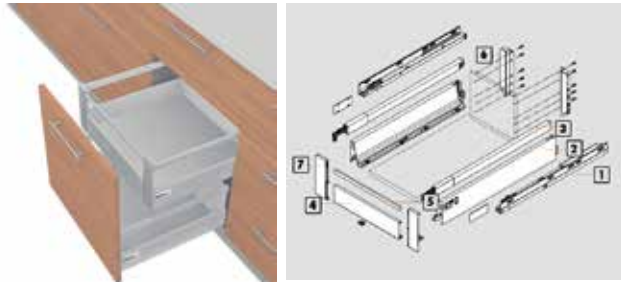

- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 207 (8-1/8")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R

#3 Select top rail (gray or stainless steel)

length	gray	stainless steel
17 11/16"	ZRG387RSIC	ZRG387RIIC
19 11/16"	ZRG437RSIC	ZRG437RIIC
21 5/8"	ZRG487RSIC	ZRG487RIIC

#4 Select front piece (nickel)

description	item #
front piece	Z31L1036ANI

#5 Select cross rail (nickel)

description	item #
cross rail	ZRG1046ZNI


#6 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30D000SLNI

#7 Select front fixing bracket (gray)

description	sides	item #
front bracket set	left and right	ZIF75D0US

TANDEMBOX D interior roll-out with double gallery

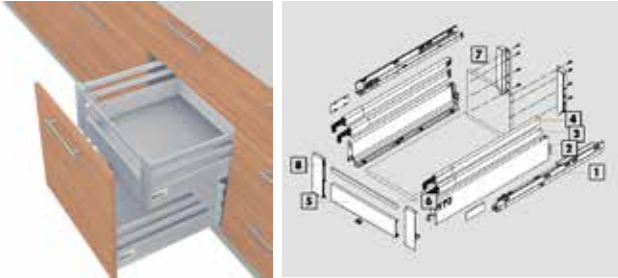

- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 207 (8-1/8")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R

#3 Select top rail (gray or stainless steel)

length	gray	stainless steel
17 11/16"	ZRG387RSIC	ZRG387RIIC
19 11/16"	ZRG437RSIC	ZRG437RIIC
21 5/8"	ZRG487RSIC	ZRG487RIIC

#4 Select center rail (gray or stainless steel)

length	gray	stainless steel
17 11/16"	ZRG387RSIE	ZRG387RIIE
19 11/16"	ZRG437RSIE	ZRG437RIIE
21 5/8"	ZRG487RSIE	ZRG487RIIE

#5 Select front piece (nickel)

description	item #
front piece	Z31L1036ANI

#6 Select cross rail (nickel)

description	item #
cross rail	ZRG1046ZNI



#7 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30D000SLNI

#8 Select front fixing bracket (gray)

description	sides	item #
front bracket set	left and right	ZIF75D0US

TANDEMBOX D interior roll-out with design element



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 203 (8")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (stainless steel)

length	drawer profile (ss)
17 11/16"	358L4502IA2L&R
19 11/16"	358L5002IA2L&R
21 5/8"	358L5502IA2L&R

#3 Select BOXCOVER

description	sides	item #
BOXCOVER set	front and rear	Z36L002GI

#7 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30D000SLNI

#4 Select design element

length	glass
17 11/16"	Z37G390DUS
19 11/16"	Z37G440DUS
21 5/8"	Z37G490DUS

#5 Select front piece (nickel)

description	item #
front piece	Z31L1036ANI


#6 Select cross rail (nickel)

description	item #
cross rail	ZRG1046ZNI

#8 Select front fixing bracket (nickel)

description	sides	item #
front bracket set	left and right	ZIF82D001NI

TANDEMBOX D interior roll-out with BOXCAP



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Drawer side height 201 (7-15/16")

#1 Select cabinet profile (75 lb or 150 lb)

length	cabinet profile (75 lb)	cabinet profile (150 lb)
17 11/16"	5584501B01R&L	5564501BR&L
19 11/16"	5585001B	5565001BR&L
21 5/8"	5585501B	5565501BR&L

#2 Select drawer profile (stainless steel)

length	drawer profile (ss)
17 11/16"	358L4502IA2L&R
19 11/16"	358L5002IA2L&R
21 5/8"	358L5502IA2L&R

#3 Select BOXCAP

length	metal
17 11/16"	Z37L440IDL&R
19 11/16"	Z37L490IDL&R
21 5/8"	Z37L540IDL&R

#4 Select front piece (nickel)

description	item #
front piece	Z31L1036ANI

#6 Select rear fixing bracket (nickel)

description	sides	item #
rear bracket set	left and right	Z30D000SLNI


#5 Select cross rail (nickel)

description	item #
cross rail	ZRG1046ZNI

#7 Select front fixing bracket (nickel)

description	sides	item #
front bracket set	left and right	ZIF82D001NI

TANDEMBOX M SPACE CORNER



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Two-dimensional drawer front adjustment
- Dynamic load capacity of 150 lb

#1 Select cabinet profile

length	cabinet profile (150 lb)
17 11/16"	5564501BR&L
19 11/16"	5565001BR&L
21 5/8"	5565501BR&L


#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R

#3A,B,C Select space corner set - M (gray or nickel)

description	item #
bracket set (6)	ZSF340EM1R906

TANDEMBOX D SPACE CORNER with single gallery



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 150 lb

#1 Select cabinet profile

length	cabinet profile (150 lb)
17 11/16"	5564501BR&L
19 11/16"	5565001BR&L
21 5/8"	5565501BR&L

#2 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R

#3 Select gallery rail (gray or stainless steel)

length	gray	stainless steel
17 11/16"	ZRG387RSIC	ZRG387RIIC
19 11/16"	ZRG437RSIC	ZRG437RIIC
21 5/8"	ZRG487RSIC	ZRG487RIIC

#4 Select space corner set - D (nickel)

description	item #
bracket set (6)	ZSF345ED1R906


#5 Select design element (gray)

length	metal
17 11/16"	Z37A417D
19 11/16"	Z37A467D
21 5/8"	Z37A517D

#6 Select gallery bracket set (gray)

description	sides	item #
bracket set	left and right	Z36D0080

TANDEMBOX D SPACE CORNER with BOXCAP or design element



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Three-dimensional drawer front adjustment
- Drawer side can be used with BOXCAP or design element
- Dynamic load capacity of 150 lb

#1 Select cabinet profile

length	cabinet profile (150 lb)
17 11/16"	5564501BR&L
19 11/16"	5565001BR&L
21 5/8"	5565501BR&L

#2 Select drawer profile (stainless steel)

length	drawer profile (ss)
17 11/16"	358M4502IAL&R
19 11/16"	358M5002IAL&R
21 5/8"	358M5502IAL&R

#3 Select BOXCOVER

description	sides	item #
BOXCOVER set	front and rear	Z36L002GI

#4 Select design element

length	glass
17 11/16"	Z37G390DUS
19 11/16"	Z37G440DUS
21 5/8"	Z37G490DUS

or

#5 Select BOXCAP

length	metal
17 11/16"	Z37L440IDL&R
19 11/16"	Z37L490IDL&R
21 5/8"	Z37L540IDL&R


#6A, B, C Select space corner set - D

description	item #
bracket set (6)	ZSF345ED1R906

TANDEMBOX wraparound sink drawer



- Full extension drawer system with BLUMOTION
- TANDEM smooth running mechanism
- Two-dimensional drawer front adjustment
- Dynamic load capacity of 75 lb and 150 lb
- Please speak to a Würth Wood Group Sales Representative for complete wraparound options

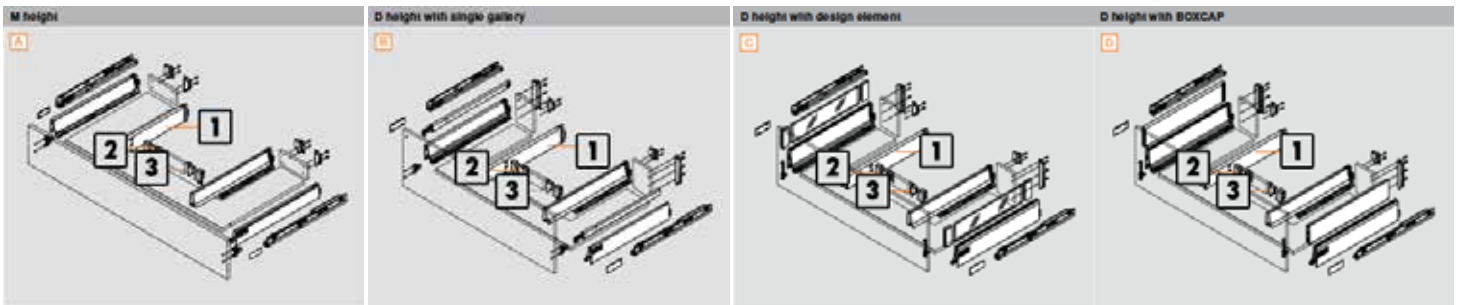

#1 Select drawer profile (gray or stainless steel)

length	drawer profile (gray)	drawer profile (ss)
17 11/16"	358M4502SARLR906	358M4502IAL&R
19 11/16"	358M5002SARLR906	358M5002IAL&R
21 5/8"	358M5502SARLR906	358M5502IAL&R


#2 Select center adapter set

description	sides	item #
adapter set	left and right	Z30N00026ZA

#3 Select rear fixing bracket

description	sides	item #
rear bracket set	left and right	Z30N000S04NI

Note: All of the above need to be purchased in order to make the wraparound sink drawer.

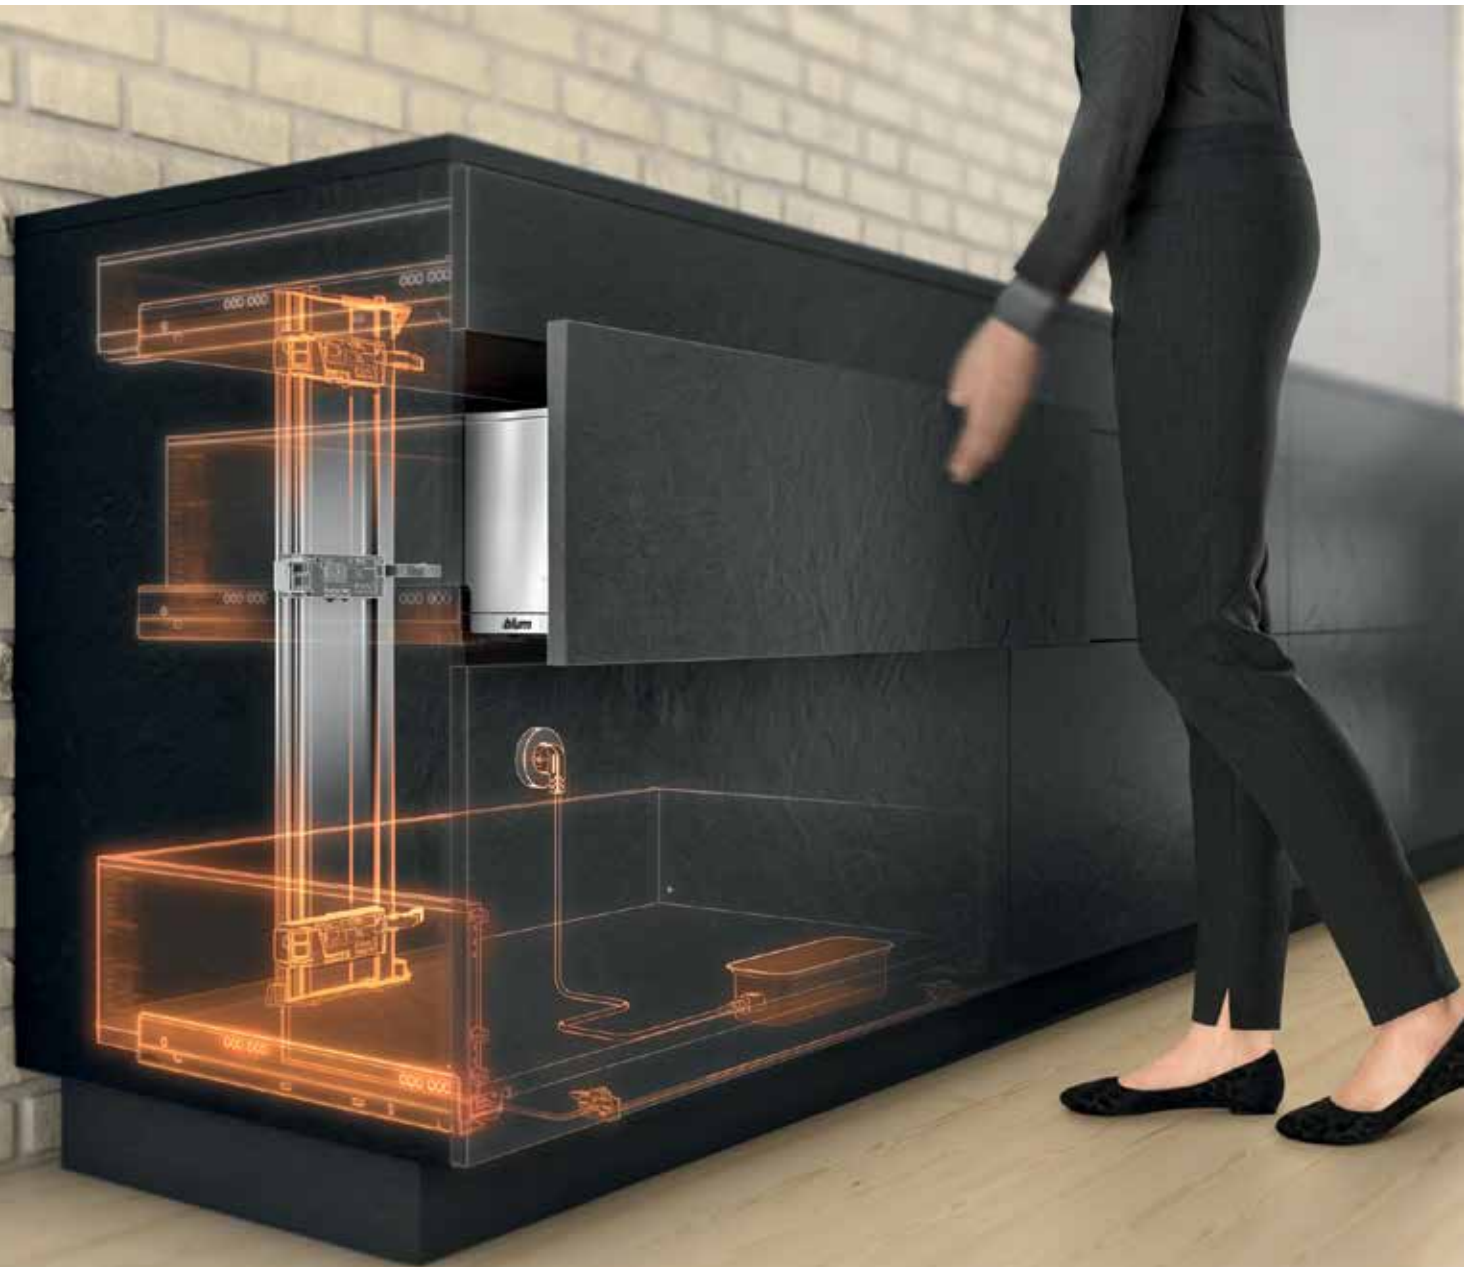

LEGRABOX

ELEGANCE IN MOTION:

Straight lines create the elegant look that defines LEGRABOX, our newest premium metal drawer system. It is available in two luxurious finishes that complement a wide variety of styles and colors, and three drawer side heights cover a wide range of design options in the kitchen, bath, or furniture applications.

BENEFITS AT A GLANCE:

- Available in two colors – Orion gray and stainless steel
- Easy height, side, tilt adjustment
- Matching organization options
- Can be upgraded with touch to open features



Design

Sleek Design

Impressively slim 1/2" drawer sides, which are straight on both the inside and out, provide a sleek look while maximizing usable interior drawer space.



Versatility

The versatile LEGRABOX program allows for a wide range of design options for any kitchen, bath or furniture application. LEGRABOX combines design and function for well-balanced solutions creating elegance in motion.



Refined, luxurious finishes

LEGRABOX in matte Orion gray or brushed stainless steel finishes compliment a wide range of colors and materials.



Features

BLUMOTION

All LEGRABOX profiles feature BLUMOTION soft close creating an unsurpassed opening and closing experience. BLUMOTION adapts to different weights and closing forces to give a smooth and silent close every time. Whether it is a small top drawer or a wide deep drawer, BLUMOTION guarantees the quiet close you have come to expect from Blum.




AMBIA-LINE

Both stylish and practical, AMBIA-LINE drawer organization system provides a clean, harmonious look and function to the interior of your drawer. Stored items are always organized, easy to find and readily accessible. Other organizational options also include our kitchen accessories.



Easy Adjustments

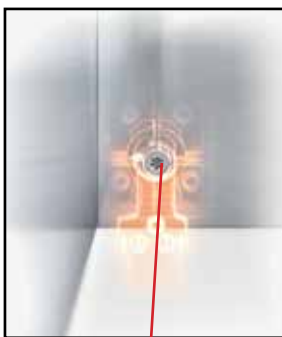

Tilt adjustment



Height adjustment



Side adjustment



Front removal

LEGRABOX overview

M height



M height interior roll-out



C height



C height interior roll-out



F height



AMBIA-LINE



M Height Drawer

- Full extension drawer system with BLUMOTION
- Smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 88 lb and 155 lb
- Drawer profile height 90.5 (3-9/16")



Cabinet Profile Sets

Nominal Length	Cabinet Profile Length	88 lb option	155 lb option
11"	270 (10 - 5/8")	7502701B	
14"	350 (13 - 3/4")	7503501B	
16"	400 (15 - 3/4")	7504001B	
18"	450 (17 - 11/16")	7504501B	7534501B
20"	500 (19 - 11/16")	7505001B	7535001B
22"	550 (21 - 5/8")	7505501B	7535501B
24"	600 (23 - 5/8")		7536001B

Drawer Profile Sets

Nominal Length	Drawer Profile Length	Orion Gray	Stainless Steel
11"	270 (10 - 5/8")	770M2702S	770M2702I
14"	350 (13 - 3/4")	770M3502S	770M3502I
16"	400 (15 - 3/4")	770M4002S	770M4002I
18"	450 (17 - 11/16")	770M4502S	770M4502I
20"	500 (19 - 11/16")	770M5002S	770M5002I
22"	550 (21 - 5/8")	770M5502S	770M5502I
24"	600 (23 - 5/8")	770M6002S	770M6002I

Front and Rear Fixing Brackets

Type	Attachment	Part Number
Front (2 required per drawer)	EXPANDO	ZF7M70E2
Front (2 required per drawer)	Screw - On (Screw Sold Sep)	ZF7M7002
Rear (Left and Right Included)	Screw - On (Screw Sold Sep)	ZB7M000S

AND

C Height Drawer

- Full extension drawer system with BLUMOTION
- Smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 88 lb and 155 lb
- Drawer profile height 177 (7")



Cabinet Profile Sets

Nominal Length	Cabinet Profile Length	88 lb option	155 lb option
11"	270 (10 - 5/8")	7502701B	
14"	350 (13 - 3/4")	7503501B	
16"	400 (15 - 3/4")	7504001B	
18"	450 (17 - 11/16")	7504501B	7534501B
20"	500 (19 - 11/16")	7505001B	7535001B
22"	550 (21 - 5/8")	7505501B	7535501B
24"	600 (23 - 5/8")		7536001B

Drawer Profile Sets

Nominal Length	Drawer Profile Length	Orion Gray	Stainless Steel
11"	270 (10 - 5/8")	770C2702S	770C2702I
14"	350 (13 - 3/4")	770C3502S	770C3502I
16"	400 (15 - 3/4")	770C4002S	770C4002I
18"	450 (17 - 11/16")	770C4502S	770C4502I
20"	500 (19 - 11/16")	770C5002S	770C5002I
22"	550 (21 - 5/8")	770C5502S	770C5502I
24"	600 (23 - 5/8")	770C6002S	770C6002I

Front and Rear Fixing Brackets

Type	Attachment	Part Number	
Front (2 required per drawer)	EXPANDO	ZF7C70E2	
Front (2 required per drawer)	Screw - On (Screw Sold Sep)	ZF7C7002	OR
Front (4 required per drawer)	EXPANDO	ZF7M70E2	
Front (4 required per drawer)	Screw - On (Screw Sold Sep)	ZF7M7002	AND
Rear (Left and Right Included)	Screw - On (Screw Sold Sep)	ZB7C000S	

F Height Drawer

- Full extension drawer system with BLUMOTION
- Smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 88 lb and 155 lb
- Drawer profile height 241 (9-1/2")



Cabinet Profile Sets

Nominal Length	Cabinet Profile Length	88 lb option	155 lb option
18"	450 (17 - 11/16")	7504501B	7534501B
20"	500 (19 - 11/16")	7505001B	7535001B
22"	550 (21 - 5/8")	7505501B	7535501B

Drawer Profile Sets

Nominal Length	Drawer Profile Length	Orion Gray	Stainless Steel
18"	450 (17 - 11/16")	770F4502S	770F4502I
20"	500 (19 - 11/16")	770F5002S	770F5002I
22"	550 (21 - 5/8")	770F5502S	770F5502I

Front and Rear Fixing Brackets

Type	Attachment	Part Number	
Front (2 required per drawer)	EXPANDO	ZF7C70E2	
Front (2 required per drawer)	Screw - On (Screw Sold Sep)	ZF7C7002	
Front (2 required per drawer)	EXPANDO	ZF7M70E2	
Front (2 required per drawer)	Screw - On (Screw Sold Sep)	ZF7M7002	
Front (6 required per drawer)	EXPANDO	ZF7M70E2	OR
Front (6 required per drawer)	Screw - On (Screw Sold Sep)	ZF7M7002	
Rear (Left and Right Included)	Screw - On (Screw Sold Sep)	ZB7F000S	AND

M Height Drawer

Interior Roll - Out

- Full extension drawer system with BLUMOTION
- Smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 88 lb and 155 lb
- Drawer profile height 90.5 (3-9/16")



Cabinet Profile Sets

Nominal Length	Cabinet Profile Length	88 lb option	155 lb option
11"	270 (10 - 5/8")	7502701B	
14"	350 (13 - 3/4")	7503501B	
16"	400 (15 - 3/4")	7504001B	
18"	450 (17 - 11/16")	7504501B	7534501B
20"	500 (19 - 11/16")	7505001B	7535001B
22"	550 (21 - 5/8")	7505501B	7535501B
24"	600 (23 - 5/8")		7536001B

Drawer Profile Sets

Nominal Length	Drawer Profile Length	Orion Gray	Stainless Steel
11"	270 (10 - 5/8")	770M2702S	770M2702I
14"	350 (13 - 3/4")	770M3502S	770M3502I
16"	400 (15 - 3/4")	770M4002S	770M4002I
18"	450 (17 - 11/16")	770M4502S	770M4502I
20"	500 (19 - 11/16")	770M5002S	770M5002I
22"	550 (21 - 5/8")	770M5502S	770M5502I
24"	600 (23 - 5/8")	770M6002S	770M6002I

Front Piece, Interior Fixing Bracket, and Rear Fixing Brackets

Type	Attachment	Part Number	
Front Piece (Cut to Size) Gray	Length 1043 (41 - 1/16")	ZV71043C01G	
Front Piece (Cut to Size) Inox	Length 1043 (41 - 1/16")	ZV71043C01	AND
Interior (Sold as Complete Set)	Screws (Included) Gray	ZI70MS0	
Interior (Sold as Complete Set)	Screws (Included) Stainless	ZI70MI0	AND
Rear (Left and Right Included)	Screw - On (Screw Sold Sep)	ZB7M000S	

C Height Drawer

Interior Roll - Out

- Full extension drawer system with BLUMOTION
- Smooth running action
- Three-dimensional drawer front adjustment
- Dynamic load capacity of 88 lb and 155 lb
- Drawer profile height 177 (7")



Cabinet Profile Sets

Nominal Length	Cabinet Profile Length	88 lb option	155 lb option
11"	270 (10 - 5/8")	7502701B	
14"	350 (13 - 3/4")	7503501B	
16"	400 (15 - 3/4")	7504001B	
18"	450 (17 - 11/16")	7504501B	7534501B
20"	500 (19 - 11/16")	7505001B	7535001B
22"	550 (21 - 5/8")	7505501B	7535501B
24"	600 (23 - 5/8")		7536001B

Drawer Profile Sets

Nominal Length	Drawer Profile Length	Orion Gray	Stainless Steel
11"	270 (10 - 5/8")	770C2702S	770C2702I
14"	350 (13 - 3/4")	770C3502S	770C3502I
16"	400 (15 - 3/4")	770C4002S	770C4002I
18"	450 (17 - 11/16")	770C4502S	770C4502I
20"	500 (19 - 11/16")	770C5002S	770C5002I
22"	550 (21 - 5/8")	770C5502S	770C5502I
24"	600 (23 - 5/8")	770C6002S	770C6002I

Front Piece, Interior Fixing Bracket, Cross Rail Gallery, and Rear Fixing Brackets

Type	Attachment	Part Number	
Front Piece (Cut to Size) Gray	Length 1043 (41 - 1/16")	ZV71043C01G	
Front Piece (Cut to Size) Inox	Length 1043 (41 - 1/16")	ZV71043C01	
Interior (Sold as Complete Set)	Screws (Included) Gray	ZI73CS0	AND
Interior (Sold as Complete Set)	Screws (Included) Stainless	ZI73CI0	
Cross Rail (Cut to Size) Gray	Length 1080 (42 - 1/2")	ZR71080UG	AND
Cross Rail (Cut to Size) BN	Length 1080 (42 - 1/2")	ZR71080UI	
Rear (Left and Right Included)	Screw - On (Screw Sold Sep)	ZB7C000S	AND

AMBIA-LINE



Flateware Insert 1

- Length 500 (20")
- Width 300 (12")
- Height 50 (2")
- Steel frame
- For M height drawers
- Coated with a soft touch, noise-dampening material



Narrow Utensil

- Available in 500 (20") and 550 (22") lengths
- Width 100 (4")
- Height 51 (2")
- Includes adj. cross divider (qty 1)
- Steel frame
- For M height drawers



Flateware Insert 2

- Length 550 (22")
- Width 300 (12")
- Height 50 (2")
- Steel frame
- For M height drawers
- Coated with a soft touch, noise-dampening material



Wide Utensil

- Available in 500 (20") and 550 (22") lengths
- Width 200 (8")
- Height 51 (2")
- Includes adj. cross divider (qty 1)
- Steel frame
- For M height drawers



Deep Drawer Insert

- Available for 400 (16") or longer lengths
- Height 111 (4-3/8")
- Includes adjustable cross divider (qty 1)
- Steel frame
- For C and F height drawers
- Magnetic back
- Order steel adapter




AMBIA-LINE



- For narrow utensil insert

Cross Divider 1



- For wide utensil insert

Cross Divider 2



- For deep drawer insert

Cross Divider 3



- For deep drawer insert
- Steel

Adapter Plate

Part Number	Name	Size
ZC7S500BS3	Flatware 1	500 (20")
ZC7S550BS3	Flatware 2	550 (22")
ZC7S500RS1	Narrow Utensil	500 (20")
ZC7S550RS1	Narrow Utensil	550 (22")
ZC7S500RS2	Wide Utensil	500 (20")
ZC7S550RS2	Wide Utensil	550 (22")
ZC7F400RSP	Deep Insert	500 (20")

Part Number	Name	Size
ZC7Q010SS	Cross Divider 1	100 (4")
ZC7Q020SS	Cross Divider 2	200 (8")
ZC7Q0P0FS	Cross Divider 3	N/A
ZC7A0POC	Adapter Plate	N/A

Kitchen Accessories

PLATE HOLDER



- Adjustable width 186 to 322 (7-5/16" to 12-11/16")
- Overall height 170 (6-11/16")
- Holds up to 12 plates
- Non-slip bottom
- High quality nylon and stainless steel

SPICE TRAY



- Width 200 (7-7/8")
- Length 356 (14")
- Height 84 (3-5/16")
- Non-slip bottom
- High quality nylon and stainless steel
- Use with deep drawer insert

KNIFE HOLDER



- Width 187 (7-3/8")
- Length 409 (16-1/8")
- Height 43 (1-11/16")
- Holds 9 knives
- High quality nylon and stainless steel
- Use with wide utensil insert

Part Number	Name
ZC7T0350	Plate Holder
ZC7M0200	Knife Holder
ZC7G0P01	Spice Tray



Personalize Your LEGRABOX

Part Number	Description	Color
ZA70700	Blank Cover	Orion Grey
ZA70700	Logo Cover	Orion Grey
ZA70709	Blank Cover	Nickel
ZA70709	Logo Cover	Nickel

- For use with LEGRABOX drawers
- Non-handed
- Colors: Orion gray and nickel
- Custom logo printing available



Tools and Accessories



Starter Kit

- BOXFIX E-L
- LEGRABOX boring template
- TORX 20 screw driver



Boring Template

- For exact pre-boring of drawer bottom and back



Part Number	Description
ZMM070020	Starter Kit
ZML7000	Boring Template



Few parts – many applications
The AVENTOS HK program has only four lift mechanisms and covers all common door widths and heights. This simplifies planning, ordering and warehousing.

Numerous design options
AVENTOS HK can be used in wall cabinets, in a pantry or above a refrigerator or other appliance.

Easy installation and adjustment
The three-dimensional adjustment feature enables doors to be precisely aligned.



The motion inside
The amount of technology and components placed into each lift mechanism are what provide the unparalleled smooth operation of AVENTOS.




AVENTOS planning tools
Blum has downloadable Excel® spreadsheets that provide the required parts and calculate the mounting locations for your application. They are available at blum.com/planning.



TIP-ON for AVENTOS HK
A perfect solution for handleless lift applications. TIP-ON mechanical support system makes opening doors effortless.

Tip-On / Touch Latch Set For Standard and Large Doors

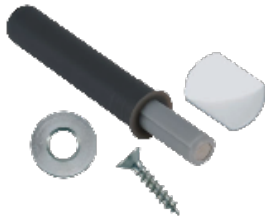

- Use standard set for door heights less than 48" and large set for doors greater than 48"
- Nylon, gray
- Works for both overlay and inset applications
- Can be bored into the panel or used with an adjustable adapter plate
- Included self-adhesive, screw-on catch plates and screw
- For use with Blum frameless style free swing hinges
- Note: Due to various door weights and sizes, trial application recommended

description	box qty	item no.
Set for standard doors	50	9551004
Set for large doors	50	955A1004

Tip-On / Touch Latch for Self-closing Hinges



- For door heights greater than 48", push out distance: 38mm
- Nylon gray mechanism with bumper tip
- For use with Blum Euro self-close hinges
- Works for overlay and inset applications
- Bored into panel or used without adjustable adapter plate

box qty	item no.
50	955A1006


Tip On Wing Adapter Plate (screw on)




- Gray nylon
- Attach with wood screws #6 x 5/8" (sold separately)
- Adjustable door gap - factory setting 2mm
- Note: for face frame applications, blocking out may be required

box qty	item no.
50	9551501



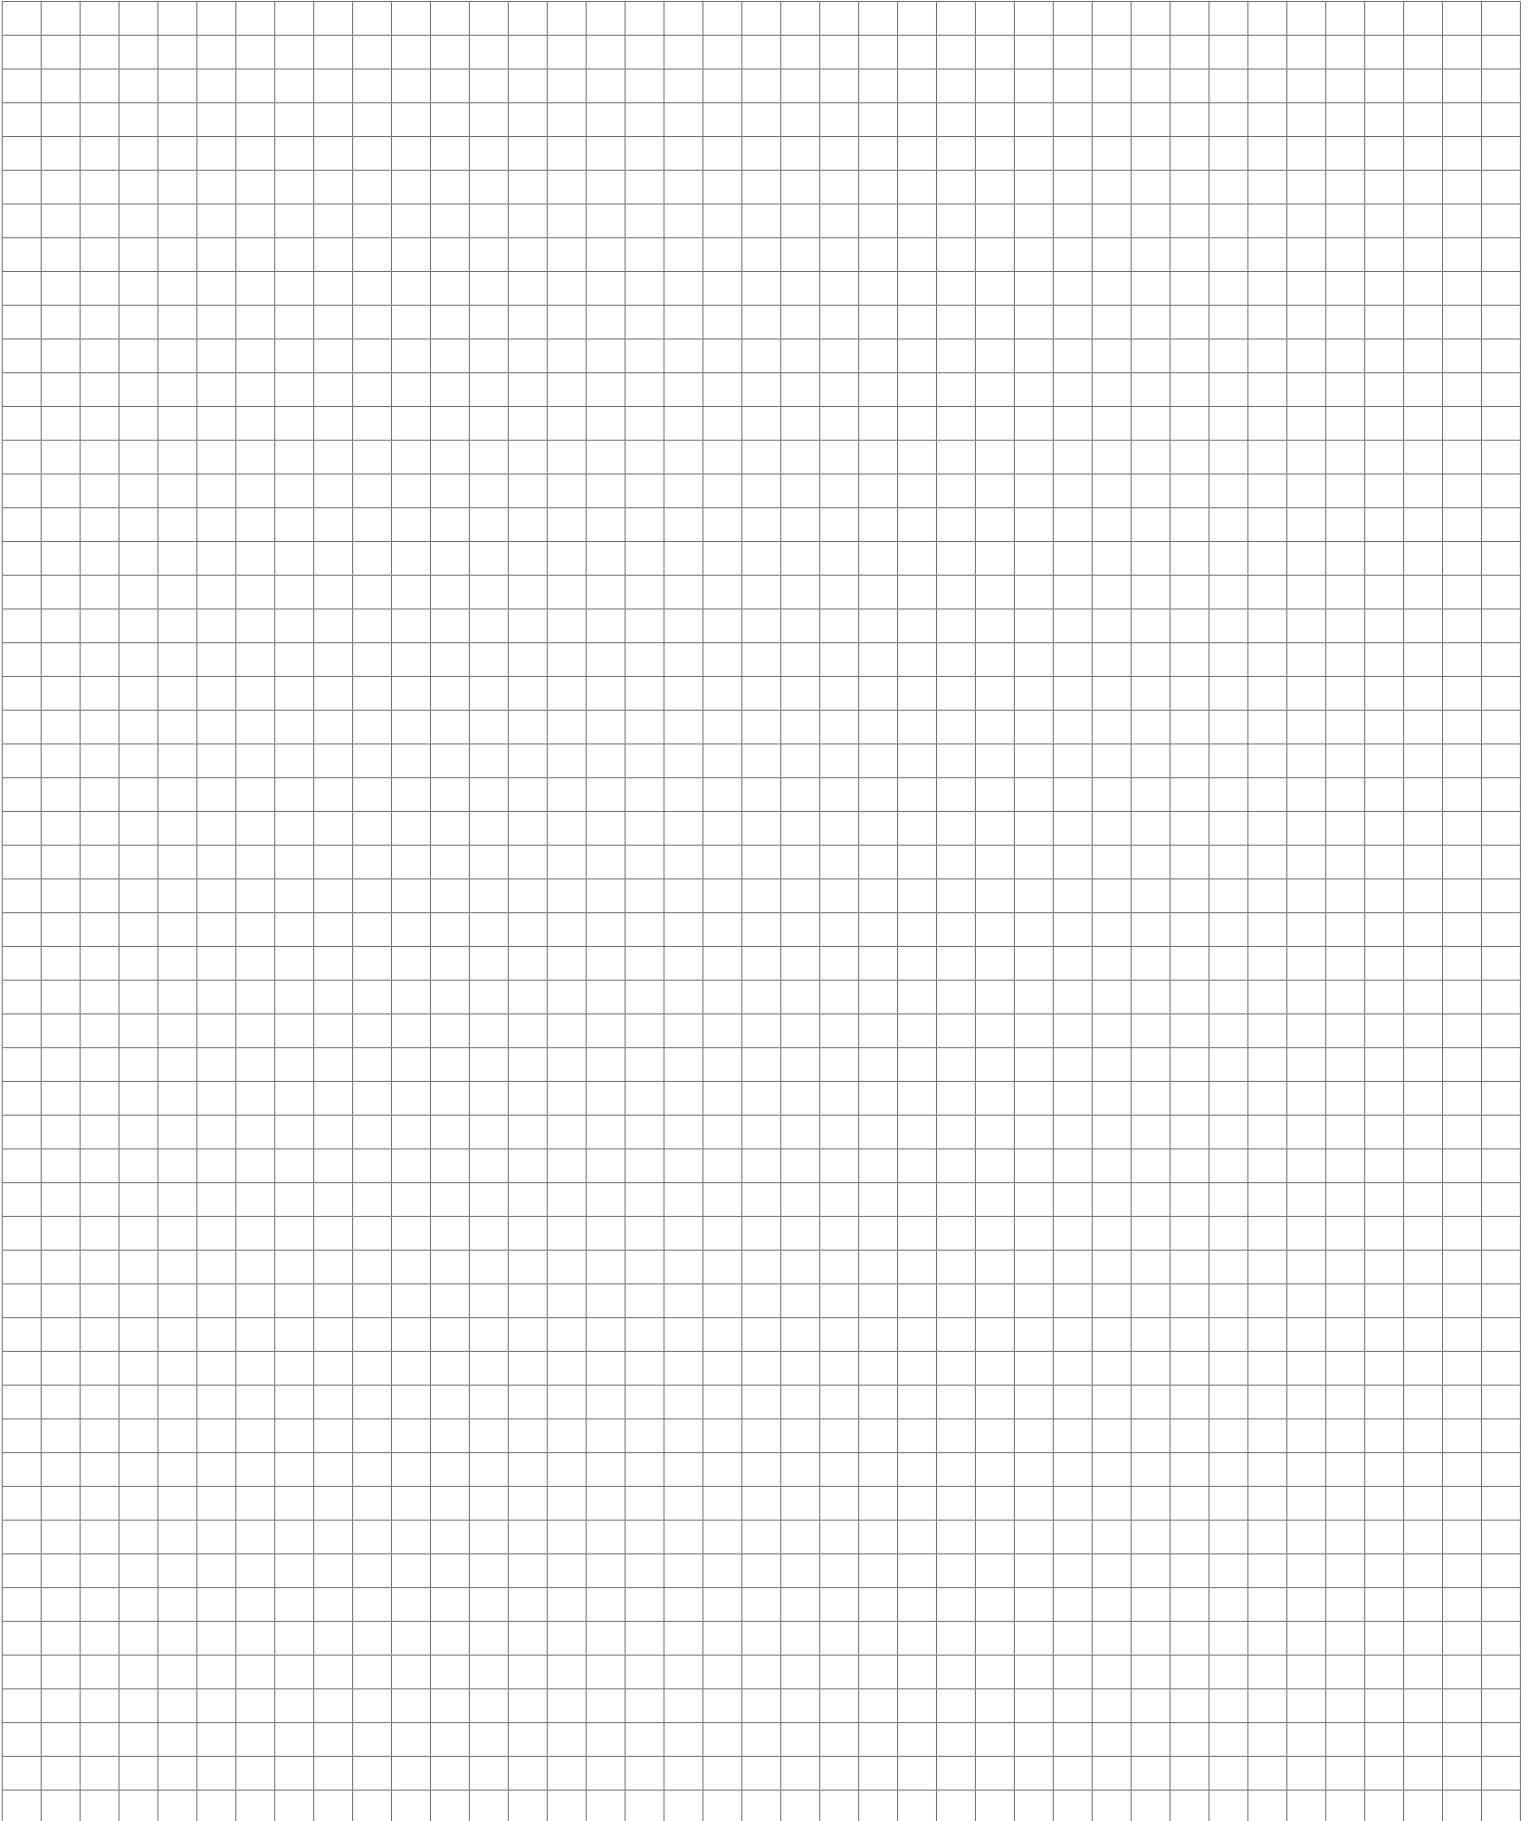

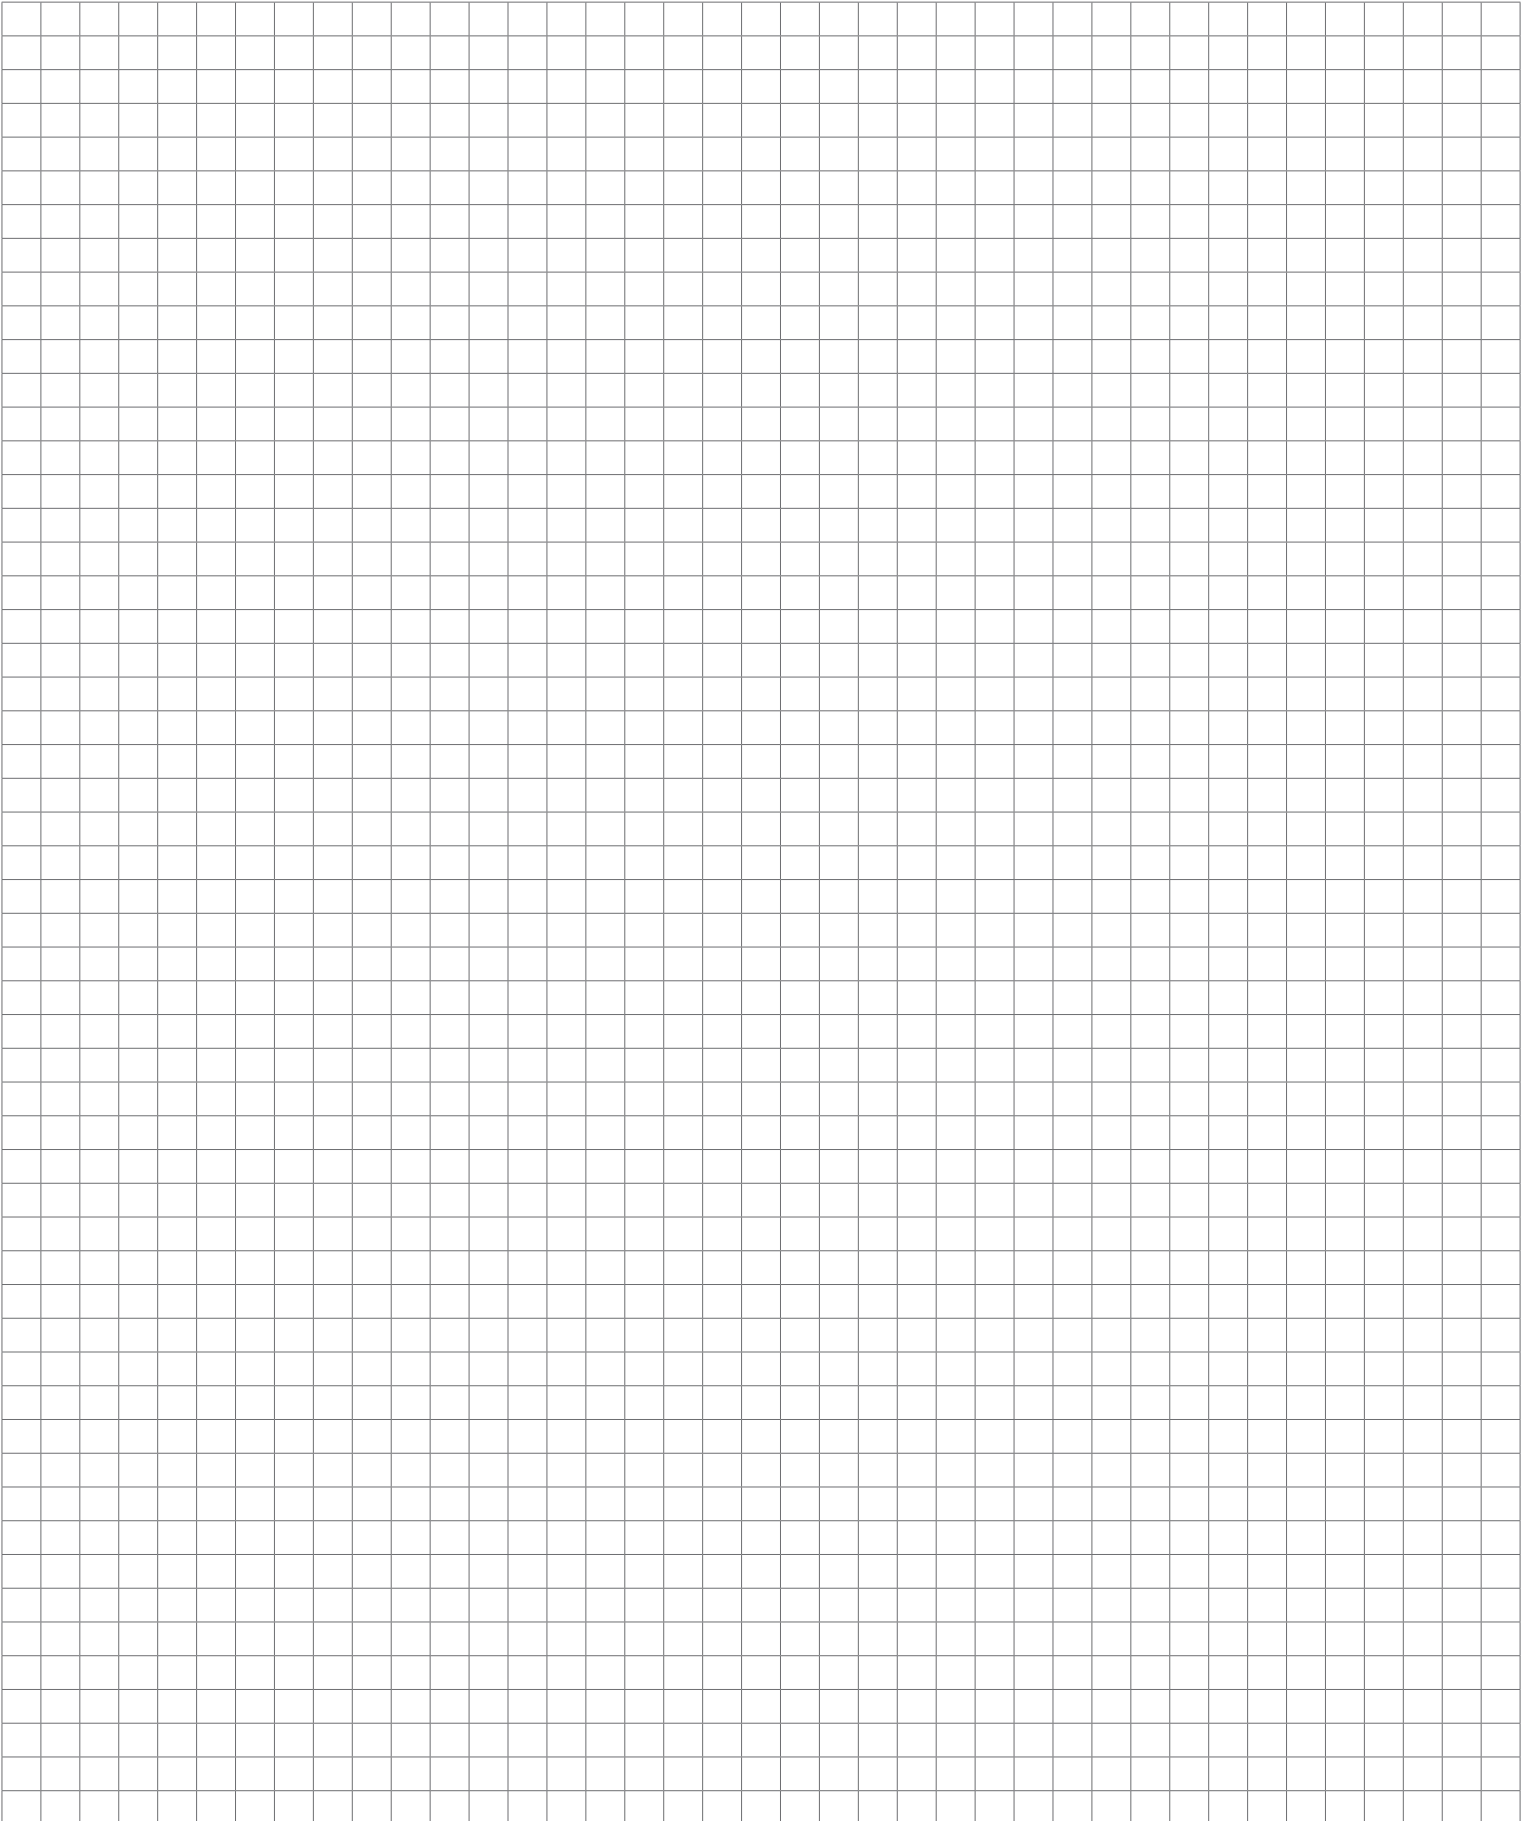

ATLANTA GA

5075 North Buford Hwy
Suite 100
Norcross, GA 30071
678.924.0386
FAX 678.924.0391

BALTIMORE MD

6660 Santa Barbara Road
Elkridge, MD 21075
410.796.7600
FAX 410.796.7729

BIRMINGHAM AL *

1640 Mims Ave., SW
Birmingham, AL 35211
205.925.7601
Fax 205.923.9511

CHARLESTON SC

4325 Lear Avenue
N. Charleston, SC 29418
843.529.0808
FAX 843.529.0805

CHARLOTTE NC

4250 Golf Acres Drive
Charlotte NC 28208
704.394.9479
FAX 704.398.2162

CHATTANOOGA TN

234 Direct Connection Drive
Rossville, GA 30741
706.891.2000
FAX 706.891.4229

DECATUR AL *

723 Old Trinity Road
Decatur, AL 35601
256.355.3161
FAX 256.355.0073

GREENSBORO NC

201 S. Pendelton Street
High Point, NC 27260
336.431.2712
FAX 336.431.2750

GREENVILLE SC

1441 Hwy 101 South
Greer, SC 29652
864.877.7328
FAX 864.877.7413

MEMPHIS TN *

5805 Advantage Cove
Memphis, TN 38141
901.367.6699
FAX 901.367.4889

MOBILE AL *

3440 Armour Ave
Mobile, AL 36617
251.378.0188
FAX 251.378.0190

MONTGOMERY AL *

581 Trade Center Street
Montgomery, AL 36108
334.265.6721
FAX 334.265.6725

NASHVILLE TN *

634 Melrose Avenue
Nashville, TN 37211
615.254.8719
FAX 615.254.8521

NORFOLK VA

3307 Chesapeake Blvd.
Norfolk, VA 23513
757.855.3908
FAX 757.857.6133

RALEIGH NC

4213 Poole Road
Raleigh, NC 27610
919.231.6620
FAX 919.231.9687

RICHMOND VA

1701 Rhoadmiller Street
Richmond, VA 23220
804.359.1374
FAX 804.353.3206

ROANOKE VA

3443 Aerial Way Drive
Roanoke, VA 24018
855.300.4455
FAX 540.344.2306

TAMPA FL

5102-B W. Hanna Avenue
Tampa, FL 33634
800.432.1149
FAX 813.887.1902

* United Plywoods and Lumber Locations

Blum Catalog 08/15